


NX & NX Z SERIES

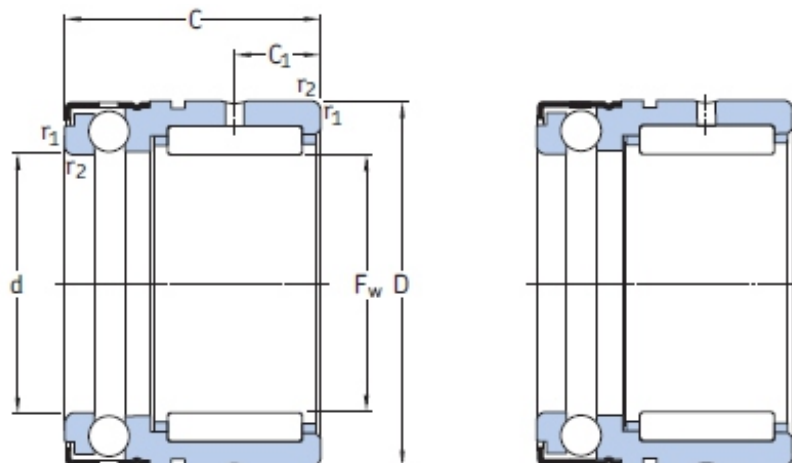

| PRINCIPAL DIMENSIONS | | | BASIC LOAD RATING | | | | FATIGUE LOAD LIMITS | |
|----------------------|----|----|-------------------|----------------|---------------|----------------|---------------------|----------------|
| | | | RADIAL DYNAMIC | STATIC | AXIAL DYNAMIC | STATIC | RADIAL | AXIAL |
| / | D | C | C | C ₀ | C | C ₀ | P _U | P _U |
| NX 7 TN | 14 | 18 | 2.81 | 2.75 | 3.45 | 5 | 0.29 | 0.186 |
| NX 7 ZTN | 14 | 18 | 2.81 | 2.75 | 3.45 | 5 | 0.29 | 0.186 |
| NX 10 | 19 | 18 | 4.95 | 4.55 | 5.07 | 8.5 | 0.53 | 0.31 |
| NX 10 Z | 19 | 18 | 4.95 | 4.55 | 5.07 | 8.5 | 0.53 | 0.31 |
| NX 12 | 21 | 18 | 5.39 | 5.2 | 5.27 | 9.65 | 0.61 | 0.355 |
| NX 12 Z | 21 | 18 | 5.39 | 5.2 | 5.27 | 9.65 | 0.61 | 0.355 |
| NX 15 | 24 | 28 | 11 | 14 | 6.18 | 12.2 | 1.66 | 0.45 |
| NX 15 Z | 24 | 28 | 11 | 14 | 6.18 | 12.2 | 1.66 | 0.45 |
| NX 17 | 26 | 28 | 12.1 | 16.6 | 6.37 | 13.4 | 1.96 | 0.5 |
| NX 17 Z | 26 | 28 | 12.1 | 16.6 | 6.37 | 13.4 | 1.96 | 0.5 |
| NX 20 | 30 | 28 | 13.2 | 19.3 | 7.8 | 17.3 | 2.28 | 0.64 |
| NX 20 Z | 30 | 28 | 13.2 | 19.3 | 7.8 | 17.3 | 2.28 | 0.64 |
| NX 25 | 37 | 30 | 15.1 | 24.5 | 12.4 | 28.5 | 2.9 | 1.06 |
| NX 25 Z | 37 | 30 | 15.1 | 24.5 | 12.4 | 28.5 | 2.9 | 1.06 |
| NX 30 | 42 | 30 | 22.9 | 38 | 12.7 | 32.5 | 4.8 | 1.2 |
| NX 30 Z | 42 | 30 | 22.9 | 38 | 12.7 | 32.5 | 4.8 | 1.2 |
| NX 35 | 47 | 30 | 24.6 | 45 | 13.5 | 38 | 5.6 | 1.4 |
| NX 35 Z | 47 | 30 | 24.6 | 45 | 13.5 | 38 | 5.6 | 1.4 |