


CPS

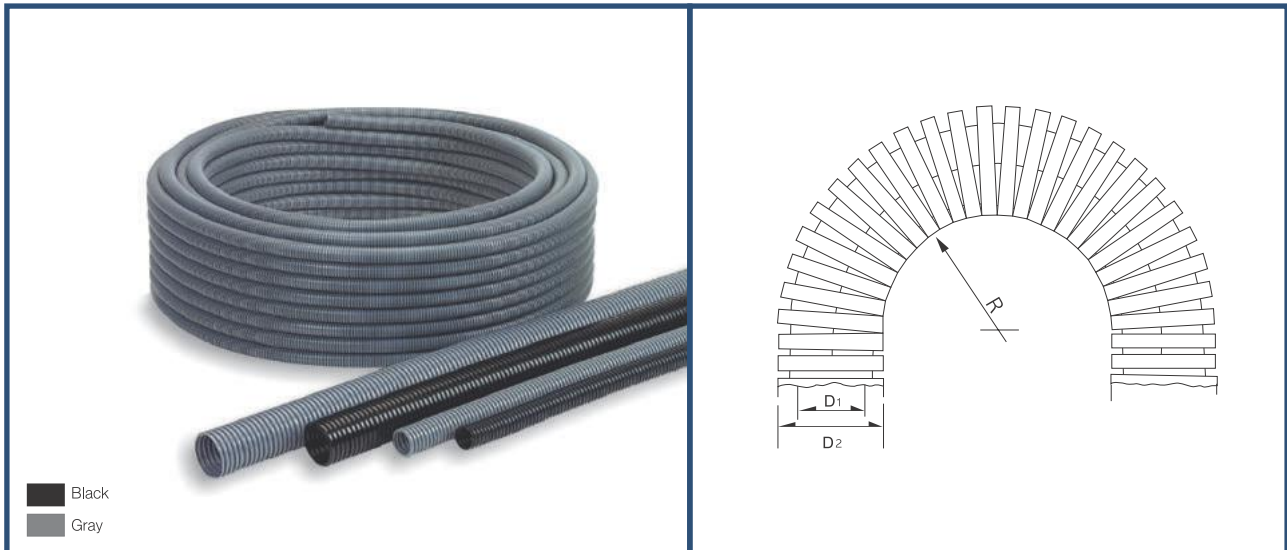

- Material : High Quality Polyamide 6
- Construction : Inside & Outside Corrugated Plastic Hose
- Degrees of Protection : IP 68 acc, EN 60529
- The max. Instantaneous Temperature : -40°C to +105°C
- Short Term : up to +130°C
- Self-Extinguishing : UL94-HB, Halogen-Free
- Color : Black & Gray, Light gray (MOQ:100rolls)
- Connections : CPSFIX
- Application : Machine tool, Shipbuilding, Tramway Industrial / Automatic Machinery Printing Machine etc.

»» Product size

Black	Gray	UV-R	Inner Diameter (D1)	Outer Diameter (D2)	Bending Radius(R) mm ± 10%	Packing meter / roll
CPS-07B	CPS-07G	CPS-07U	6.4	10.0	15	50/100
CPS-10B	CPS-10G	CPS-10U	9.6	13.0	20	50
CPS-12B	CPS-12G	CPS-12U	11.8	15.8	30	50
CPS-16B	CPS-16G	CPS-16U	15.9	21.2	40	50
CPS-22B	CPS-22G	CPS-22U	21.7	28.5	45	50
CPS-28B	CPS-28G	CPS-28U	27.8	34.5	55	50
CPS-36B	CPS-36G	CPS-36U	36.0	42.5	60	30
CPS-48B	CPS-48G	CPS-48U	46.5	54.5	70	30
CPS-56B	CPS-56G	CPS-56U	56.3	67.2	110	30
CPS-70B	CPS-70G	CPS-70U	70.0	82.5	160	10
CPS-95B	CPS-95G	CPS-95U	91.5	106.0	210	10

(Dimensions in mm)

