


## PACL IP68



- Material : High Quality Polyamide 6
- Degrees of Protection : IP 68 (EN 60529)
- The max, Instantaneous Temperature : -40°C to +105°C
- Short Term : up to +150°C
- Self-Extinguishing : UL94-HB / Free of Halogen Phosphorous and cadmium
- Color : Black & Gray
- Application : Machine tool, Shipbuilding, Tramway, Industrial / Automatic Machinery, Printing Machine etc, Joint box with connector, Connector for jointing into Limit-Switch.

### »» Product size

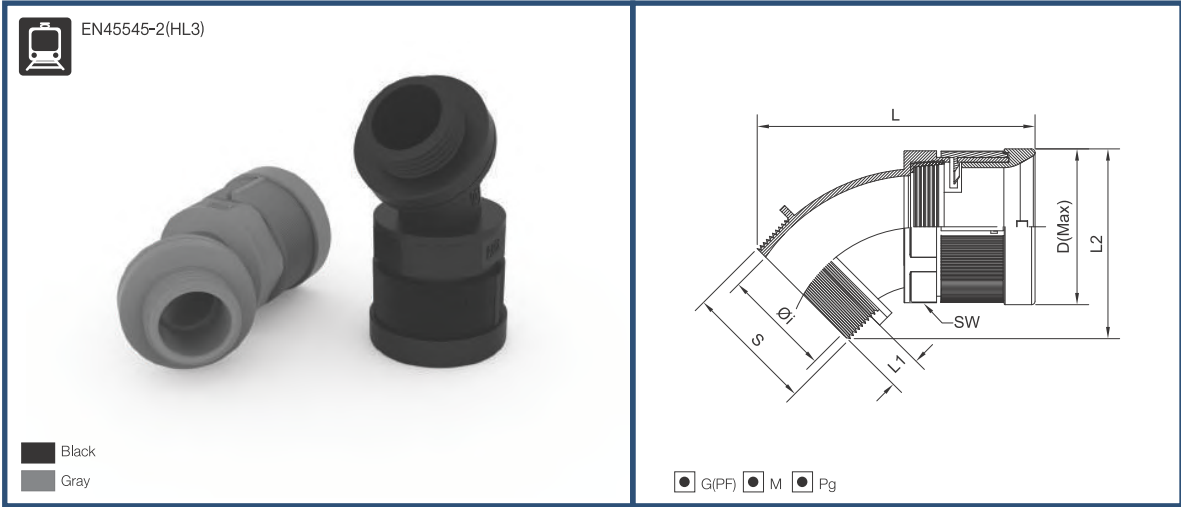

#### PF Thread / 45°Elbow (JIS B0202)

| Black     | Gray      | Thread | Tube Size | S    | L1  | L2   | L    | Øi   | ØD   | SW   |
|-----------|-----------|--------|-----------|------|-----|------|------|------|------|------|
| PACL-G10B | PACL-G10G | G1/2"  | 10        | 21.0 | 8.0 | 35.5 | 61.5 | 15.1 | 24.5 | 19.7 |
| PACL-G12B | PACL-G12G | G1/2"  | 12        | 21.0 | 8.0 | 37.6 | 62.7 | 15.1 | 27.6 | 22.8 |
| PACL-G16B | PACL-G16G | G1/2"  | 16        | 21.0 | 8.0 | 41.1 | 66.4 | 15.3 | 33.0 | 28.0 |

#### Metric Thread / 45°Elbow (EN 60423)

| Black     | Gray      | Thread    | Tube Size | S    | L1  | L2   | L    | Øi   | ØD   | SW   |
|-----------|-----------|-----------|-----------|------|-----|------|------|------|------|------|
| PACL-M10B | PACL-M10G | M12 X 1.5 | 10        | 12.0 | 8.0 | 32.2 | 58.6 | 8.1  | 24.5 | 19.7 |
| PACL-M12B | PACL-M12G | M16 X 1.5 | 12        | 16.0 | 8.0 | 35.8 | 61.3 | 12.1 | 27.6 | 22.8 |
| PACL-M16B | PACL-M16G | M20 X 1.5 | 16        | 20.0 | 8.0 | 37.2 | 62.7 | 15.1 | 27.6 | 22.8 |

#### Pg Thread / 45°Elbow (DIN 40430)

| Black      | Gray       | Thread | Tube Size | S    | L1  | L2   | L    | Øi   | ØD   | SW   |
|------------|------------|--------|-----------|------|-----|------|------|------|------|------|
| PACL-P09B  | PACL-P09G  | Pg09   | 10        | 15.5 | 8.0 | 33.7 | 59.8 | 11.1 | 24.5 | 19.7 |
| PACL-P110B | PACL-P110G | Pg11   | 10        | 18.6 | 8.0 | 34.8 | 60.9 | 15.1 | 24.5 | 19.7 |
| PACL-P130B | PACL-P130G | Pg13,5 | 10        | 20.4 | 8.0 | 35.4 | 61.5 | 15.1 | 24.5 | 19.7 |
| PACL-P11B  | PACL-P11G  | Pg11   | 12        | 18.6 | 8.0 | 37.1 | 62.2 | 14.1 | 27.6 | 22.8 |
| PACL-P136B | PACL-P136G | Pg13,5 | 16        | 20.4 | 8.0 | 41.1 | 66.5 | 15.3 | 33.0 | 28.0 |
| PACL-P16B  | PACL-P16G  | Pg16   | 16        | 22.5 | 8.0 | 41.8 | 67.3 | 17.6 | 33.0 | 28.0 |

(Dimensions in mm)

