


## PAH

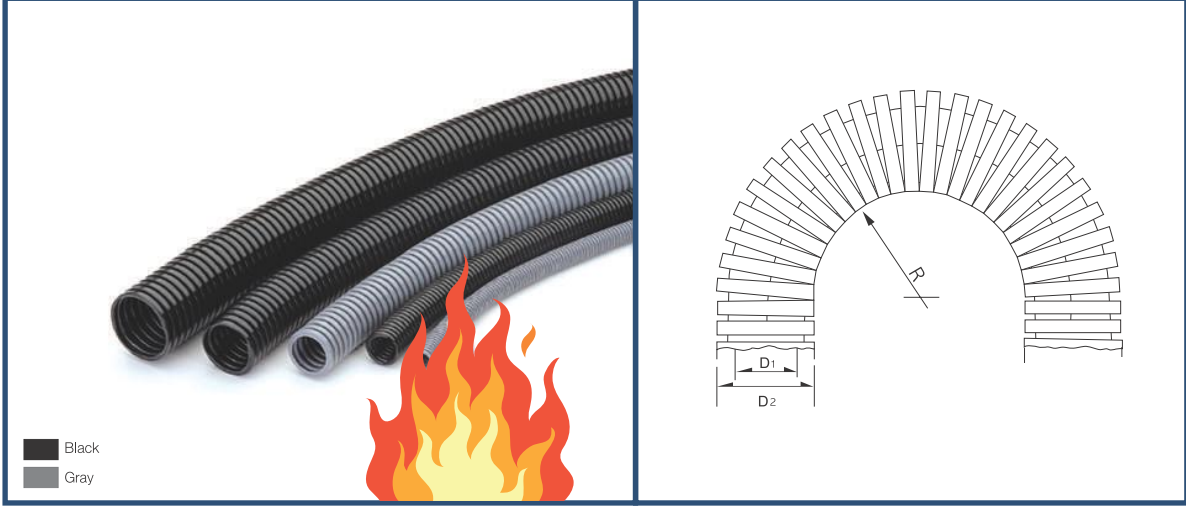

- Material : High Quality Polyamide 6
- Construction : Inside & Outside Corrugated Plastic Hose
- Degrees of Protection : IP 68 acc. EN 60529
- The max. Instantaneous Temperature : -40°C to +105°C
- Short Term : up to +150°C
- Self-Extinguishing : UL94-Vo, Halogen-Free
- Color : Black & Gray, Light gray (MOQ:100rolls)
- Connections : CPSFIX
- Application : Machine tool, Shipbuilding, Tramway Industrial, Automatic Machinery, Printing Machine, Rolling Stock, Railway, Subway etc.
- International Specification :

### »» Product size

Black	Gray	UV-R	Inner Diameter (D1)	Outer Diameter (D2)	Bending Radius(R) mm ± 10%	Packing meter / roll
PAH-07B	PAH-07G	PAH-07U	6,4	10,0	15	50/100
PAH-10B	PAH-10G	PAH-10U	9,6	13,0	20	50
PAH-12B	PAH-12G	PAH-12U	11,8	15,8	30	50
PAH-16B	PAH-16G	PAH-16U	15,9	21,2	40	50
PAH-22B	PAH-22G	PAH-22U	21,7	28,5	45	50
PAH-28B	PAH-28G	PAH-28U	27,8	34,5	55	50
PAH-36B	PAH-36G	PAH-36U	36,0	42,5	60	30
PAH-48B	PAH-48G	PAH-48U	46,5	54,5	70	30
PAH-56B	PAH-56G	PAH-56U	56,3	67,2	110	30
PAH-70B	PAH-70G	PAH-70U	70,0	82,5	160	10
PAH-95B	PAH-95G	PAH-95U	91,5	106,0	210	10

※ Available in Light Gray production.

(Dimensions in mm)



تلفن : (021) 33913364 - 33951660

فکس : (021) 33985603