


PAM

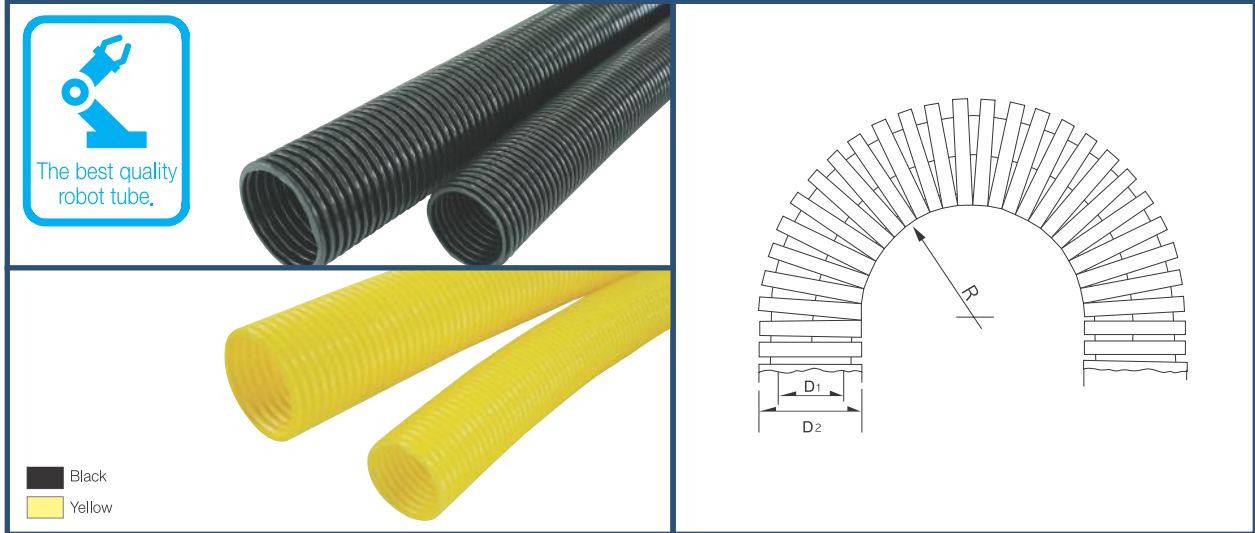

- Material : High Quality Polyamide 11/12
- Construction : Inside & Outside Corrugated Plastic Hose
- Degrees of Protection : IP 68
- The max. Instantaneous Temperature : -50°C to +95°C
- Short Term : up to +150°C
- Self-Extinguishing : UL94-V2, Halogen-Free
- Color : Black & Yellow
- Connections : CPSFIX
- Application : Robots (Welding robot)

» Product size

| Black | Yellow | Inner Diameter (D1) | Outer Diameter (D2) | Bending Radius(R) mm ±10% | Packing meter / roll |
|---------|---------|---------------------|---------------------|---------------------------|----------------------|
| PAM-07B | PAM-07Y | 6,4 | 10,0 | 15 | 50/100 |
| PAM-10B | PAM-10Y | 9,6 | 13,0 | 20 | 50 |
| PAM-12B | PAM-12Y | 11,8 | 15,8 | 30 | 50 |
| PAM-16B | PAM-16Y | 15,9 | 21,2 | 40 | 50 |
| PAM-22B | PAM-22Y | 21,7 | 28,5 | 45 | 50 |
| PAM-28B | PAM-28Y | 27,8 | 34,5 | 55 | 50 |
| PAM-36B | PAM-36Y | 36,0 | 42,5 | 60 | 30 |
| PAM-48B | PAM-48Y | 46,5 | 54,5 | 70 | 30 |
| PAM-56B | PAM-56Y | 56,3 | 67,2 | 110 | 30 |
| PAM-70B | PAM-70Y | 70,0 | 82,5 | 160 | 10 |
| PAM-95B | PAM-95Y | 91,5 | 106,0 | 210 | 10 |

(Dimensions in mm)

