


PAR

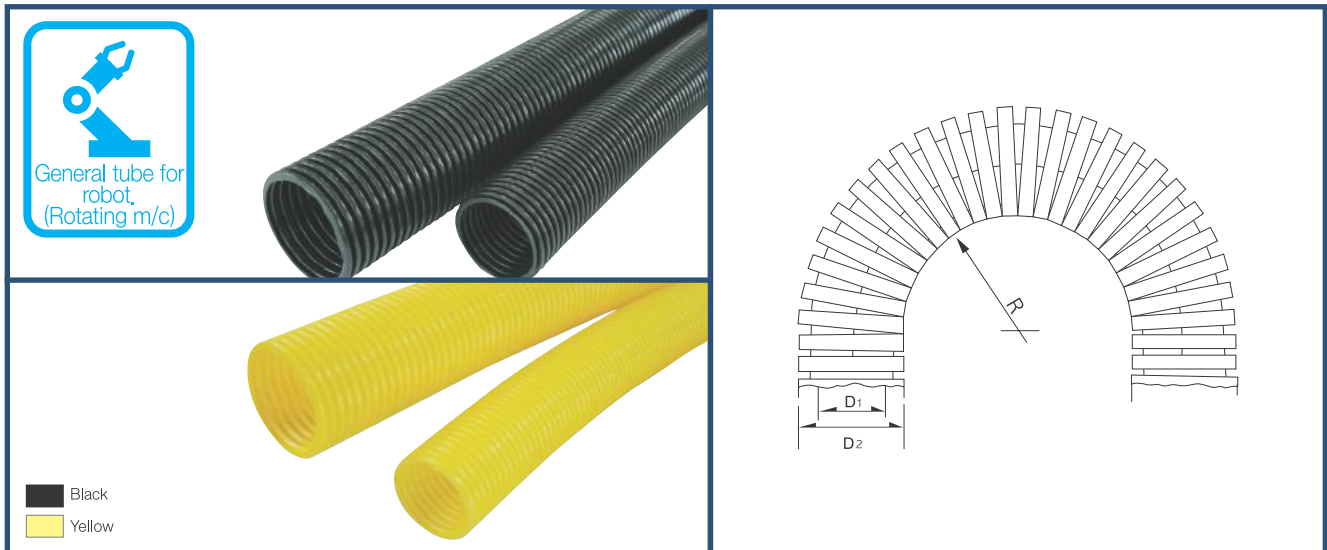

- Material : High Quality Polyamide 12
- Construction : Inside & Outside Corrugated Plastic Hose
- Degrees of Protection : IP 68
- The max, Instantaneous Temperature : -50°C to +95°C
- Short Term : up to +150°C
- Self-Extinguishing : UL94-V2, Halogen-Free
- Color : Black & Yellow
- Connections : CPSFIX
- Application : Robots (Handling robot, Rotating machinery)

» Product size

Black	Yellow	UV-R (Only black)	Inner Diameter (D1)	Outer Diameter (D2)	Bending Radius(R) mm ± 10%	Packing meter / roll
PAR-07B	PAR-07Y	PAR-07U	6.4	10.0	15	50/100
PAR-10B	PAR-10Y	PAR-10U	9.6	13.0	20	50
PAR-12B	PAR-12Y	PAR-12U	11.8	15.8	30	50
PAR-16B	PAR-16Y	PAR-16U	15.9	21.2	40	50
PAR-22B	PAR-22Y	PAR-22U	21.7	28.5	45	50
PAR-28B	PAR-28Y	PAR-28U	27.8	34.5	55	50
PAR-36B	PAR-36Y	PAR-36U	36.0	42.5	60	30
PAR-48B	PAR-48Y	PAR-48U	46.5	54.5	70	30
PAR-56B	PAR-56Y	PAR-56U	56.3	67.2	110	30
PAR-70B	PAR-70Y	PAR-70U	70.0	82.5	160	10
PAR-95B	PAR-95Y	PAR-95U	91.5	106.0	210	10

(Dimensions in mm)

