


NEW **RAH**

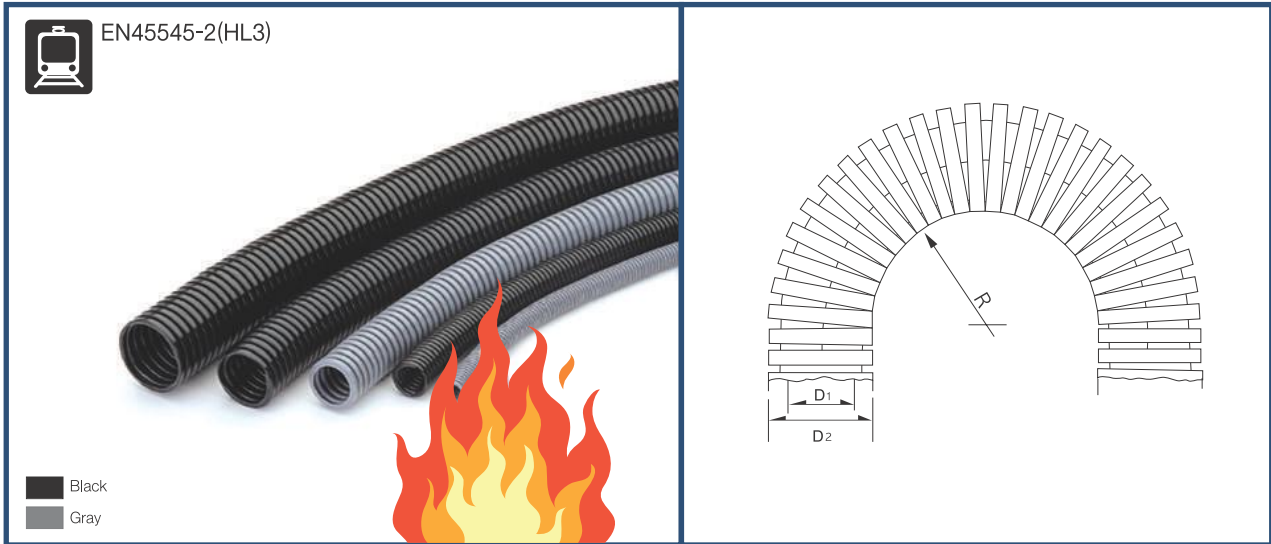

- Material : High Quality Polyamide 6
- Construction : Inside & Outside Corrugated Plastic Hose
- Degrees of Protection : IP 68 acc. EN 60529
- The max. Instantaneous Temperature : -40°C to +105°C
- Short Term : up to +150°C
- Self-Extinguishing : UL94-Vo, Halogen-Free
- Color : Black & Gray, Light gray (MOQ:100rolls)
- Connections : CPSFIX
- Application : Machine tool, Shipbuilding, Tramway Industrial, Automatic Machinery, Printing Machine, Rolling Stock, Railway, Subway etc.

>> Product size

Black	Gray	UV-R	Inner Diameter (D1)	Outer Diameter (D2)	Bending Radius(R) mm ± 10%	Packing meter / roll
RAH-07B	RAH-07G	RAH-07U	6.4	10.0	15.0	50/100
RAH-10B	RAH-10G	RAH-10U	9.6	13.0	20.0	50
RAH-12B	RAH-12G	RAH-12U	11.8	15.8	30.0	50
RAH-16B	RAH-16G	RAH-16U	15.9	21.2	40.0	50
RAH-22B	RAH-22G	RAH-22U	21.7	28.5	45.0	50
RAH-28B	RAH-28G	RAH-28U	27.8	34.5	55.0	50
RAH-36B	RAH-36G	RAH-36U	36.0	42.5	60.0	30
RAH-48B	RAH-48G	RAH-48U	46.5	54.5	70.0	30
RAH-56B	RAH-56G	RAH-56U	56.3	67.2	110.0	30
RAH-70B	RAH-70G	RAH-70U	70.0	82.5	160.0	10
RAH-95B	RAH-95G	RAH-95U	91.5	106.0	210.0	10

(Dimensions in mm)

