



## 3.2 Technical data and options

## MR Size 55


### MR S 55 Drawings

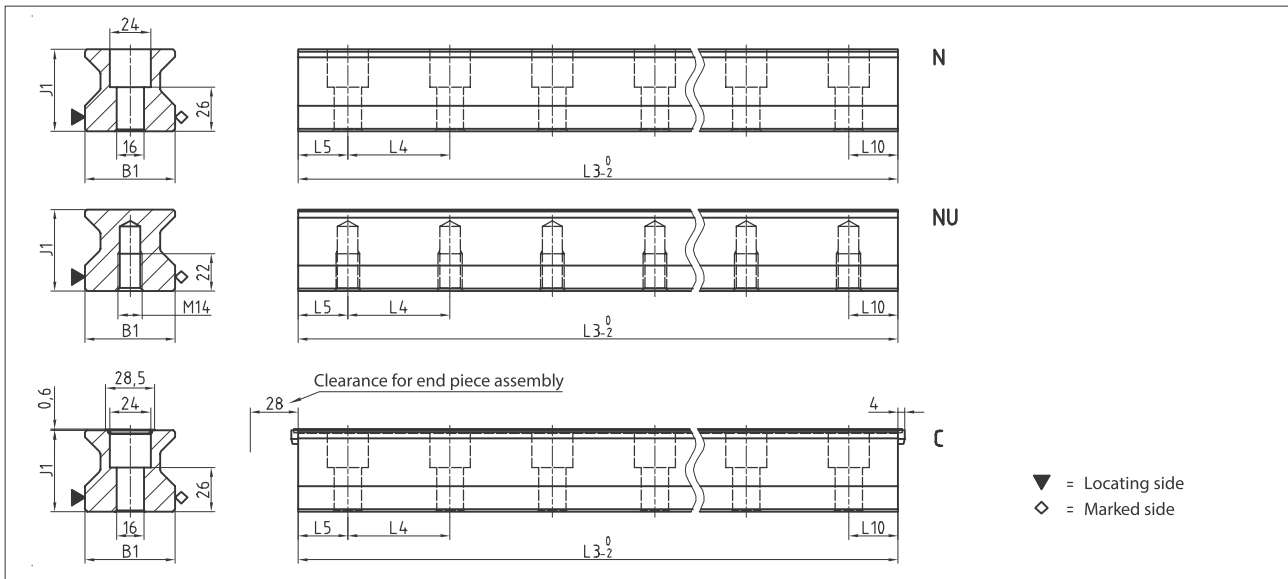


### MR W 55 Drawings

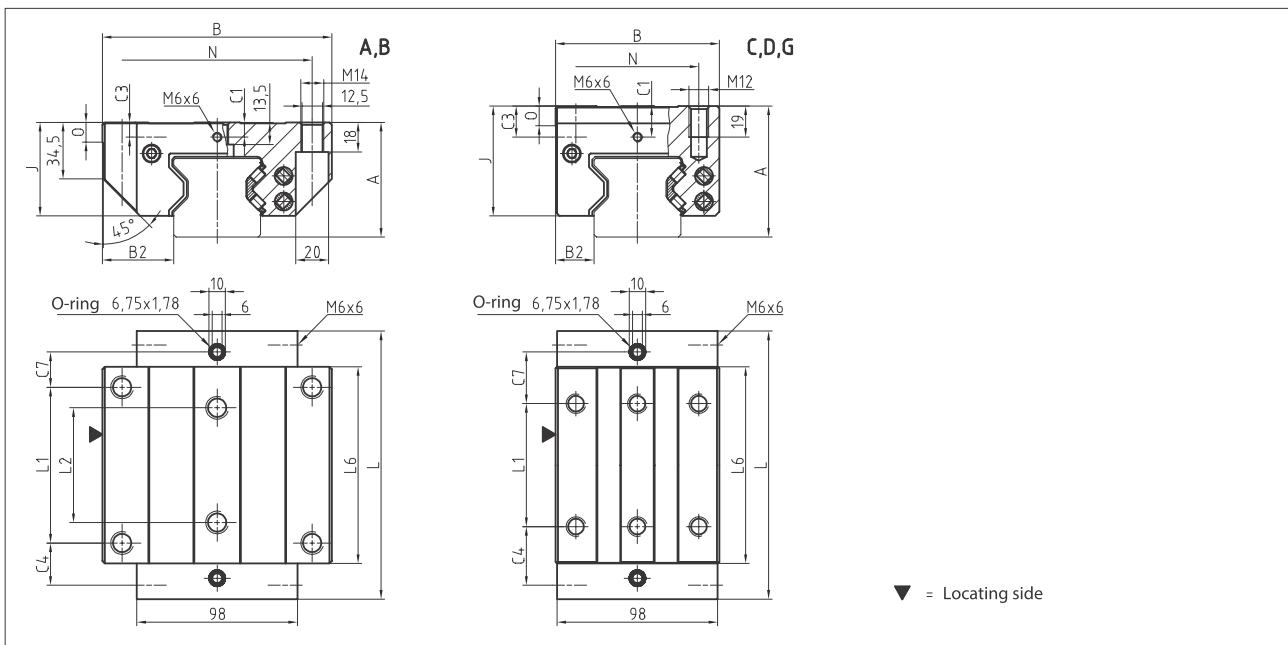

### MR W 55 Rigidity diagram

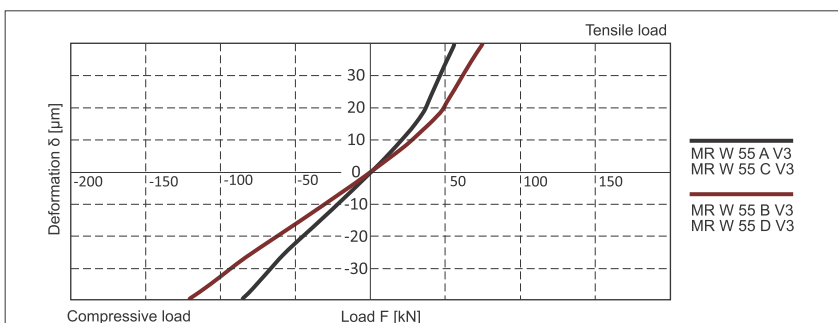

### MR W 55 Load rating

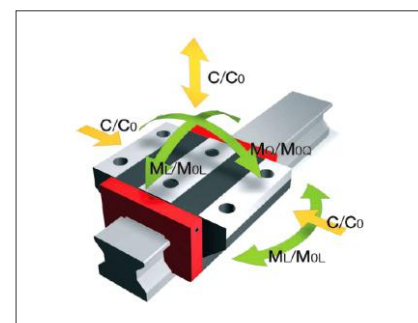

## 3.2 Technical data and options

## MR Size 55

### MR S 55 Dimensions



مشخصات	MR S 55-N	MR S 55-NU	MR S 55-C
B1: Rail width	53	53	53
J1: Rail height	48	48	48
L3: Rail length max.	6000	6000	6000
L4: Spacing of fixing holes	60	60	60
L5/L10: Position of first/last fixing hole	28.5	28.5	28.5
Gew.: Rail weight, specific (kg/m)	15.2	16.6	14.9
قیمت	دلار		
	تومان		

### MR W 55 Dimensions and capacities



مشخصات	MR W 55-A	MR W 55-B	MR W 55-C	MR W 55-D	MR W 55-G
A: System height	70	70	80	80	70
B: Carriage width	140	140	100	100	100
B2: Distance between locating faces	43.5	43.5	23.5	23.5	23.5
C1: Position of center front lube hole	9	9	19	19	9
C3: Position of lateral lube hole	9	9	19	19	9
C4: Position of lateral lube hole	25.75	46.75	35.75	46.75	46.75
C7: Position of top lube hole	21.5	42.5	31.5	42.5	42.5
J: Carriage height	57	57	67	67	57
L: Carriage length	163.5	205.5	163.5	205.5	205.5
L1: Exterior fixing hole spacing	95	95	75	95	95
L2: Interior fixing hole spacing	70	70	-	-	-
L6: Steel body length	120	162	120	162	162
N: Lateral fixing hole spacing	116	116	75	75	75
O: Reference face height	12	12	12	12	12
Capacities and weights					
C0: Static load capacity (N)	237000	324000	237000	324000	324000
C100: Dynamic load capacity (N)	131900	180500	131900	180500	180500
M0Q: Static cross moment capacity (Nm)	7771	10624	7771	10624	10624
M0L: Static longitud. moment capacity (Nm)	4738	8745	4738	8745	8745
MQ: Dyn. cross moment capacity (Nm)	4325	5919	4325	5919	5919
ML: Dyn. longitud. moment capacity (Nm)	2637	4872	2637	4872	4872
Gew: Carriage weight (kg)	5.0	6.8	4.5	6.1	4.8
قیمت	دلار				
	تومان				