



TRS-V Series Specifications



Model No.	Assembly(mm)			Block(mm)							Rail(mm)								
	H	W2	E	W	B	J	L	L1	QXl	T1	Oil Hole	N	W1	H1	φD	h	φd	F	
TRS15VS	24	9.5	3.2	34	26	26	39.3	22.9	M4X5	5.5	M4X0.7	7	15	13	7.5	6	4.5	60	
TRS15VN							26	55.9											39.5
TRS15VL							26	64.4											48
TRS15VE							34	79.4											63
TRS20VS	28	11	4.6	42	32	32	47.8	27.8	M5X5	4.5	M6X1	14	20	16.5	9.5	8.5	6	60	
TRS20VN							32	66.7											46.7
TRS25VS	33	12.5	5.8	48	35	35	56.2	35.2	M6X6	4.5	M6X1	14	23	20	11	9	7	60	
TRS25VN							35	80											59
TRS30VS	42	16	7	60	40	40	66.4	40.4	M8X8	8	M6X1	14	28	23	14	12	9	80	
TRS30VN							40	95.3											69.3
TRS30VL							40	106											80
TRS30VE							60	131											105
TRS35VS	48	18	7.5	70	50	50	74.7	45.7	M8X8	8	M6X1	14	34	26	14	12	9	80	
TRS35VN							50	108											79
TRS35VL							50	122											93
TRS35VE							72	152											123
TRS45VN	60	20.5	8.9	86	60	60	124.5	90.5	M10X15	10.5	PT1/8	12.5	45	32	20	17	14	105	
TRS45VL							60	140											106
TRS45VE							80	174											140

※The above standard provided is dedicated to XN, UN, please check table 2.2.17 for detail, if other accessories is required, please refer to page A90.

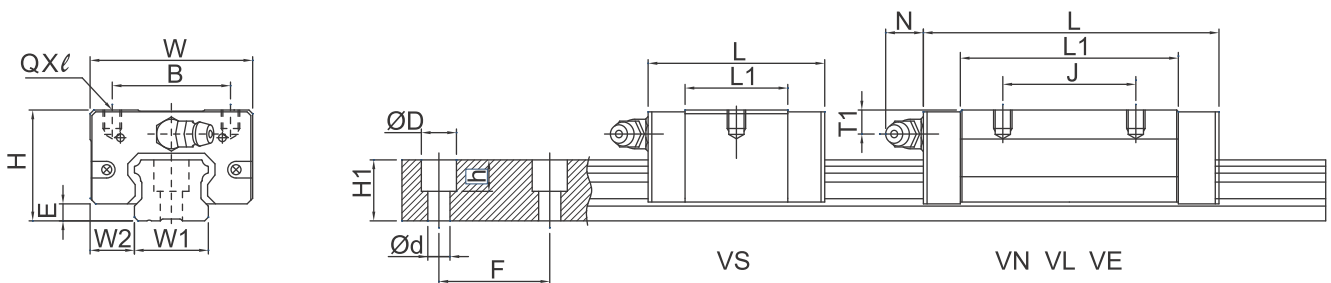

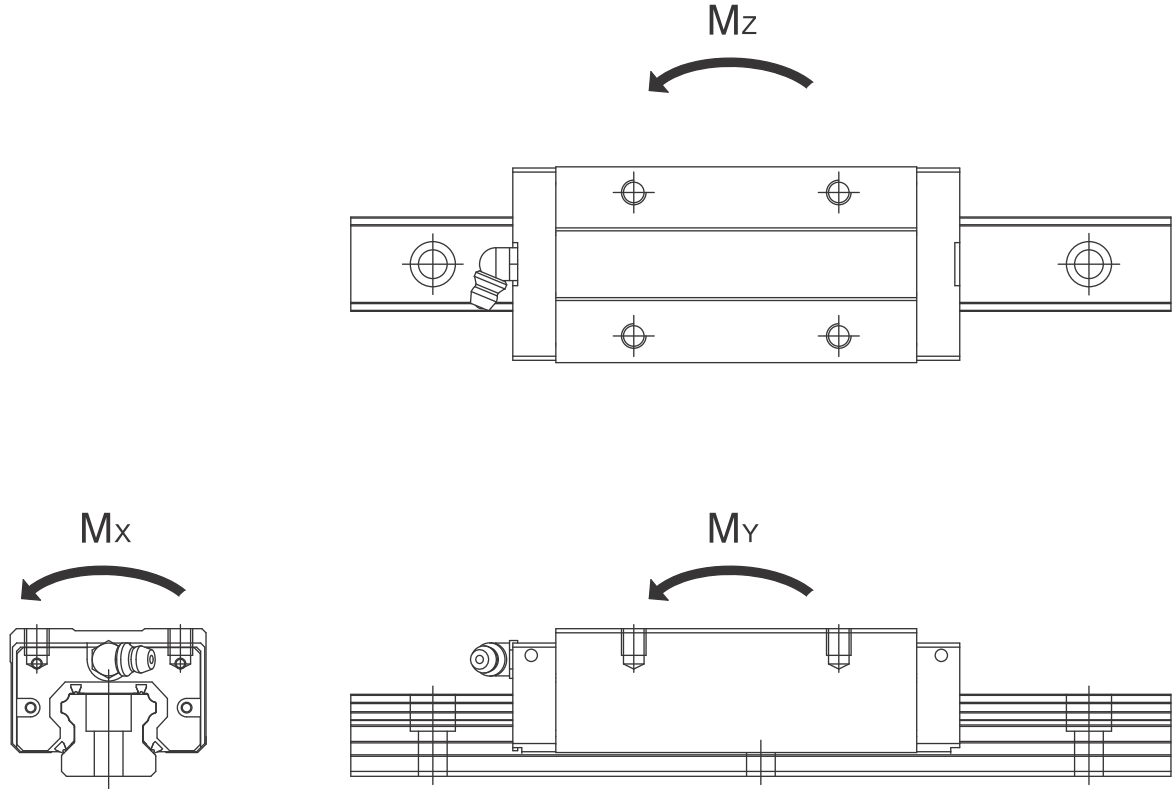

Model No.	Rating Load (kgf)		Static permissible moment of load					Weight		
	C	Co	Mx(kgf-mm)		My(kgf-mm)		Mz(kgf-mm)		Block (kg)	Rail (kg/m)
			Single Block	Single Block	Double Block	Single Block	Double Block			
TRS15VS	908	1471	10,957	6,420	33,531	6,420	33,531	0.07	1.32	
TRS15VN	1206	2206	16,436	14,884	70,960	14,884	70,960	0.13		
TRS15VL	1343	2574	19,175	20,429	95,224	20,429	95,224	0.15		
TRS15VE	1560	3187	23,740	31,616	145,220	31,616	145,220	0.2	2.28	
TRS20VS	1398	2140	21,615	10,700	59,798	10,700	59,798	0.11		
TRS20VN	1896	3307	33,404	26,459	126,998	26,459	126,998	0.18		
TRS25VS	1943	3002	34,826	18,725	97,890	18,725	97,890	0.18	3.17	
TRS25VN	2581	4503	52,239	43,407	207,324	43,407	207,324	0.3		
TRS30VS	2697	3962	55,442	26,950	154,224	26,950	154,224	0.37	4.54	
TRS30VN	3807	6483	90,722	74,970	355,321	74,970	355,321	0.65		
TRS30VL	4098	7203	100,803	93,100	438,966	93,100	438,966	0.74		
TRS30VE	4791	9004	126,003	147,000	677,068	147,000	677,068	0.97	6.27	
TRS35VS	3753	5401	92,349	42,896	235,304	42,896	235,304	0.57		
TRS35VN	5090	8346	142,722	106,070	519,799	106,070	519,799	0.98		
TRS35VL	5502	9328	159,512	133,367	656,509	133,367	656,509	1.16		
TRS35VE	6667	12274	209,885	233,977	1,070,533	233,977	1,070,533	1.54	10.4	
TRS45VN	6758	10887	248,758	158,011	782,271	158,011	782,271	1.71		
TRS45VL	7572	12808	292,657	220,751	1,030,183	220,751	1,030,183	1.99		
TRS45VE	8852	16010	365,821	348,554	1,598,703	348,554	1,598,703	2.64		

