









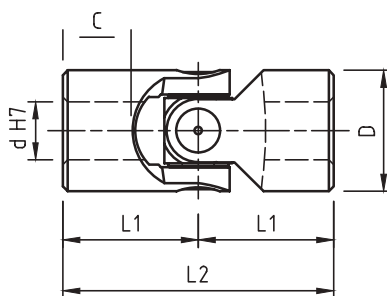




serie «G»

series (DIN 808)

- Wear resistant sliding bushes from cemented and hardened steel
- Strong precise and versatile; wide application field.
- Max angle: 45° - Max speed 1000 R.P.M.
- "G" to DIN 808 - 2GB" to DIN 808/7551
- Special executions on request



Mod. Type	No keyways		d	D	L2	L1	C	One keyway		two keyways		Two square bores		Q	* SW	Weight Kg		
																	a	b
01G	SG0S	0600	6	16	34	17	8	SG0S	061C	SG0S	062C	2	7	SG0S	062Q	6	6	0.05
02G	SG0S	0800	8	16	40	20	11	SG0S	081C	SG0S	082C	2	9	SG0S	082Q	8	8	0.05
03G	SG0S	1000	10	22	48	24	12	SG0S	101C	SG0S	102C	3	11.4	SG0S	102Q	10	10	0.10
04G	SG0S	1200	12	25	56	28	13	SG0S	121C	SG0S	122C	4	13.8	SG0S	122Q	12	12	0.16
05G	SG0S	1400	14	28	60	30	14	SG0S	141C	SG0S	142C	5	16.3	SG0S	142Q	14	14	0.20
1G	SG0S	1600	16	32	68	34	16	SG0S	161C	SG0S	162C	5	18.3	SG0S	162Q	16	16	0.30
2G	SG0S	1800	18	36	74	37	17	SG0S	181C	SG0S	182C	6	20.8	SG0S	182Q	18	18	0.45
3G	SG0S	2000	20	42	82	41	18	SG0S	201C	SG0S	202C	6	22.8	SG0S	202Q	20	20	0.60
4G	SG0S	2200	22	45	95	47.5	22	SG0S	221C	SG0S	222C	6	24.8	SG0S	222Q	22	22	0.95
5G	SG0S	2500	25	50	108	54	26	SG0S	251C	SG0S	252C	8	28.3	SG0S	252Q	25	25	1.20
6G	SG0S	3000	30	58	122	61	29	SG0S	301C	SG0S	302C	8	33.3	SG0S	302Q	30	30	1.85
6G1	SG0S	3200	32	58	130	65	33	SG0S	321C	SG0S	322C	10	35.3	SG0S	322Q	30	30	2.00
7G	SG0S	3500	35	70	140	70	33	SG0S	351C	SG0S	352C	10	38.3	—	**	**	3.15	
8G	SG0S	4000	40	80	160	80	38	SG0S	401C	SG0S	402C	12	43.3	—	**	**	4.60	
9G	SG0S	5000	50	95	190	95	46	SG0S	501C	SG0S	502C	14	53.8	—	**	**	7.60	

Criteria di scelta pag. - Selection criteria page 38

*= Non sempre disponibile a magazzino / Not always available in stock

**= A richiesta / On request

