
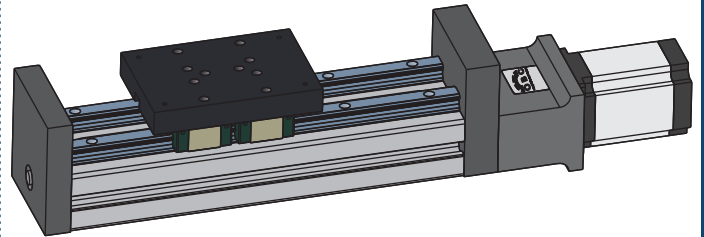



45*90 B

مدول خطی با سیستم حرکت بال اسکرو و لینیرگاید کوپل مستقیم موتور

کاور روی مدول خطی به صورت سفارشی قابل تحویل است



| Load | Static | Two blocks | Four blocks |
|---|--------|------------|-------------|
| ■ F _x | (N) | 1450 | 1705 |
| ■ F _y | (N) | 1384 | 3000 |
| ■ F _z | (N) | 1636 | 3600 |
| Moment | | | |
| ■ M _x | (Nm) | 290 | 290 |
| ■ M _y | (Nm) | 180 | 180 |
| ■ M _z | (Nm) | 180 | 170 |

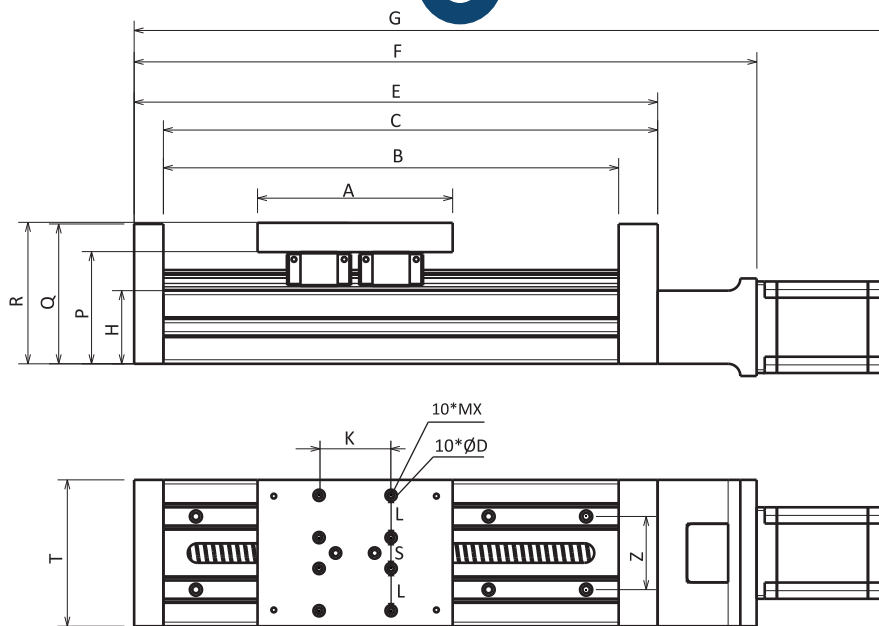

Unit : mm

| کد کس | A | B | C | E | F | G | H | P | Q | R | K | L | S | T | Z | X | ØD | قیمت | |
|------------|--------------------------------|-----|-----|-----|-----|-----|----|----|----|----|----------------------|----|----|----|----|----------|----|------|-------|
| | | | | | | | | | | | | | | | | | | دلار | تومان |
| 45*90 B | 120 | 280 | 304 | 322 | 383 | 464 | 45 | 69 | 86 | 87 | 44 | 26 | 19 | 90 | 45 | 3 | 7 | | |
| Body | 45X90 Profile (Aluminium 6063) | | | | | | | | | | Max Length | | | | | 2000 mm | | | |
| Max Speed | 0,1 m/sec | | | | | | | | | | Linear Rail | | | | | 15 | | | |
| Pitch | 5 mm | | | | | | | | | | Linear Block | | | | | TRS 15VS | | | |
| Ball Screw | Ø12-05 | | | | | | | | | | Positioning Accuracy | | | | | 0,01 mm | | | |