


بلبرینگ های زاویه ای دور بالا مخصوص موتورهای اسپیندل

70AD

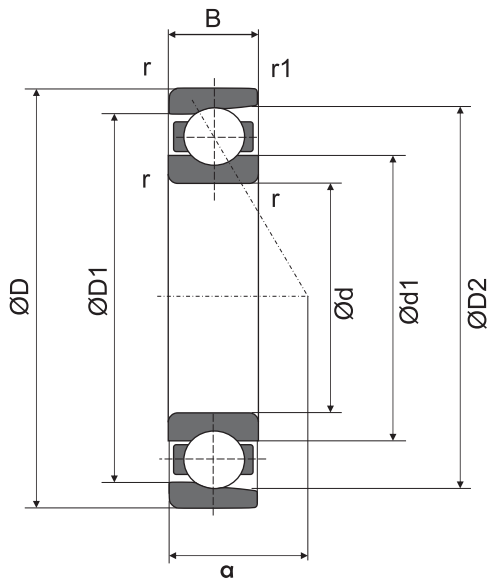


کد UK	d	D	B	r's min	r1s min	تحميل بار				ظرفيت بار محور		قيمت	
						دايناميك		استاتيک		(KN)	(Kgf)	دلار	تومان
						Cr (KN)	Cr (Kgf)	Cor (KN)	Cor (Kgf)				
7000 AD	10	26	8	0.30	0.15	5.1	520	2.41	245	3.2	330		
7001 AD	12	28	8	0.30	0.15	5.2	530	2.53	260	4	410		
7002 AD	15	32	9	0.30	0.15	6.0	610	3.24	330	4.9	505		
7003 AD	17	35	10	0.30	0.15	6.3	640	3.65	370	4.4	450		
7004 AD	20	42	12	0.60	0.30	10.6	1080	6.27	640	7.5	770		
7005 AD	25	47	12	0.60	0.30	11.1	1100	7.1	720	8.3	850		
7006 AD	30	55	13	1.00	0.60	14.4	1470	9.8	1000	11.6	1180		
7007 AD	35	62	14	1.00	0.60	18.2	1860	13.1	1335	15.7	1600		
7008 AD	40	68	15	1.00	0.60	19.5	1990	15.1	1540	16.7	1700		
7009 AD	45	75	16	1.00	0.60	23.1	2360	18.3	1865	20.6	2100		
7010 AD	50	80	16	1.00	0.60	24.6	2510	20.8	2120	23	2350		
7011 AD	55	90	18	1.10	0.60	32.4	3300	27.2	2775	29.9	3050		
7012 AD	60	95	18	1.10	0.60	33.2	3390	29	2960	31.8	3240		
7013 AD	65	100	18	1.10	0.60	35.1	3580	32.5	3315	34.8	3550		
7014 AD	70	110	20	1.10	0.60	44.4	4530	40.9	4170	48.5	4950		
7015 AD	75	115	20	1.10	0.60	45.4	4630	43.2	4405	48.6	4960		
7016 AD	80	125	22	1.10	0.60	55.6	5670	52.5	5360	58.3	5950		
7017 AD	85	130	22	1.10	0.60	56.9	5810	53.5	5460	61.3	6250		
7018 AD	90	140	24	1.50	1.10	67.8	6920	65.5	6680	75	7650		
7019 AD	95	145	24	1.50	1.10	69.5	7090	69.4	7080	76	7750		
7020 AD	100	150	24	1.50	1.10	71.2	7260	73.1	7460	82.8	8450		

به صورت سفارشی قابل تحویل می باشد

بلبرینگ های زاویه ای دور بالا مخصوص موتورهای اسپیندل

70AD

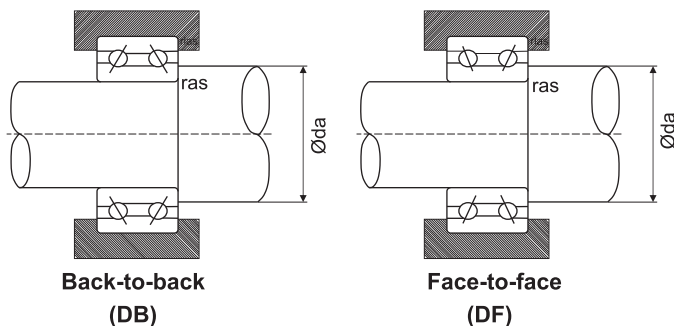

کد UIC	مرکز بار a	محدوده سرعت		d1	d2	D1	D2	da min	Da max	Db max	ras max	rlas max	ظرفیت (cm ³)	وزن (kg)
		گریس	روغن											
7000 AD	8	57500	87600	15.4	-	20.6	22.9	12.5	23.5	24.8	0.3	0.15	0.96	0.019
7001 AD	8.5	51800	78800	18.1	-	22.6	25.4	14.5	25.5	26.8	0.3	0.15	1.04	0.021
7002 AD	9.5	44100	67100	21.1	-	26.1	28.5	17.5	29.5	30.8	0.3	0.15	1.33	0.03
7003 AD	10.5	39900	60700	23.4	-	28.6	31.0	19.5	32.5	33.8	0.3	0.15	1.78	0.039
7004 AD	12.5	33400	50900	27.5	-	34.5	37.7	25	37	39.5	0.6	0.3	3.26	0.067
7005 AD	13.5	28800	43800	32.5	-	39.5	42.7	29.5	42.5	44.5	0.6	0.3	3.85	0.078
7006 AD	15.5	24400	37100	38.6	-	46.4	50.0	36	49	50	1.0	0.5	5.11	0.114
7007 AD	17	21400	32500	44.2	-	52.8	56.9	41	56	57	1.0	0.5	7.26	0.151
7008 AD	19	19200	29300	49.6	-	58.3	62.4	45.5	62.5	63.5	1.0	0.6	8.89	0.189
7009 AD	21	17300	26300	55.2	-	64.8	69.2	51	69	70	1.0	0.5	11.11	0.238
7010 AD	22	15900	24300	60.2	-	69.8	74.2	55.5	74.5	75.5	1.0	0.6	11.85	0.259
7011 AD	24	14300	21800	66.8	-	78.1	83.4	62	83	85	1.0	0.6	17.78	0.38
7012 AD	25	13400	20300	71.8	-	83.1	88.4	67	88	90	1.0	0.6	19.26	0.405
7013 AD	26.5	12600	19200	76.8	-	88.1	93.4	72	93	95.5	1.0	0.6	21.23	0.435
7014 AD	29	11500	17600	83.6	-	96.4	102.5	77	103	105	1.0	0.6	26.67	0.606
7015 AD	30	11000	16700	88.5	-	101.5	107.5	82	108	111	1.0	0.6	27.54	0.643
7016 AD	32.5	10200	15400	95.1	-	109.9	116.7	87	118	121	1.0	0.6	37.78	0.855
7017 AD	34	9600	14700	100.1	-	114.9	121.7	92	123	126	1.0	0.6	39.26	0.898
7018 AD	36	9000	13800	106.8	-	123.2	130.8	99	131	134	1.5	0.8	48.89	1.16
7019 AD	37	8600	13100	111.7	-	128.2	135.8	103.5	136.5	140	1.5	1.0	50.37	1.21
7020 AD	38	8300	12600	116.8	-	133.2	140.8	108.5	141.5	145	1.5	1.0	53.33	1.27

به صورت سفارشی قابل تحویل می باشد