


بلبرینگ های زاویه ای دور بالا مخصوص موتورهای اسپیندل

72C

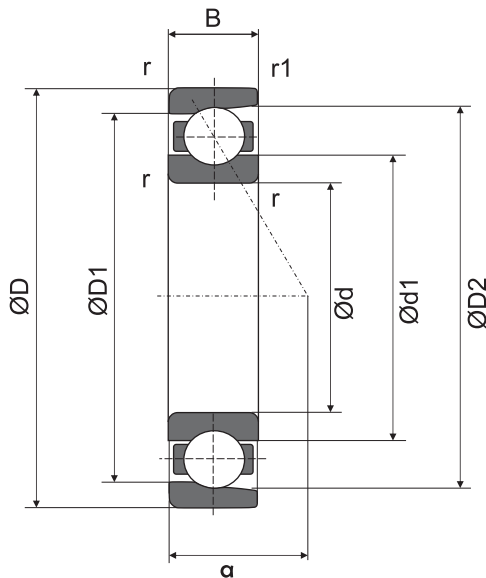


کد UK	d	D	B	r _s min	r _{1s} min	تحميل بار				ظرفيت بار محور		قيمت	
						دايناميك		استاتيک		(KN)	(Kgf)	دلار	تومان
						Cr (KN)	Cr (Kgf)	Cor (KN)	Cor (Kgf)				
7200 C	10	30	9	0.6	0.3	5.40	555	2.64	269	1.01	103		
7201 C	12	32	10	0.6	0.3	7.10	720	3.45	355	1.59	162		
7202 C	15	35	11	0.6	0.3	9.00	915	4.50	460	1.89	193		
7203 C	17	40	12	0.6	0.3	11.2	1140	5.75	590	2.67	272		
7204 C	20	47	14	1.0	0.6	14.6	1490	8.15	835	3.70	375		
7205 C	25	52	15	1.0	0.6	16.6	1690	10.2	1050	3.75	385		
7206 C	30	62	16	1.0	0.6	23.0	2350	14.7	1500	1.10	725		
7207 C	35	72	17	1.1	0.6	30.5	3100	19.9	2030	10.6	1090		
7208 C	40	80	18	1.1	0.6	36.5	3700	25.2	2570	14.4	1470		
7209 C	45	85	19	1.1	0.6	41.0	4150	28.8	2940	14.8	1510		
7210 C	50	90	20	1.1	0.6	43.0	4350	31.5	3250	15.3	1560		
7211 C	55	100	21	1.5	1.0	53.0	5400	40.0	4100	21.6	200		
7212 C	60	110	22	1.5	1.0	64.0	6550	49.5	5050	26.1	2660		
7213 C	65	120	23	1.5	1.0	70.0	7100	55.0	5600	28.5	2910		
7214 C	70	125	24	1.5	1.0	76.0	7750	60.0	6150	31.0	3150		
7215 C	75	130	25	1.5	1.0	79.5	8100	65.5	6700	33.5	3400		
7216 C	80	140	26	2.0	1.0	93.0	9450	77.5	7900	34.5	3550		
7217 C	85	150	28	2.0	1.0	104	10600	90.5	9200	46.5	4750		
7218 C	90	160	30	2.0	1.0	123	12500	105	10700	53.5	5450		
7219 C	95	170	32	2.1	1.1	139	14200	120	12200	62.0	6350		
7220 C	100	180	34	2.1	1.1	149	15200	127	12900	67.0	6800		

به صورت سفارشی قابل تحویل می باشد

بلبرینگ های زاویه ای دور بالا مخصوص موتورهای اسپیندل

72C

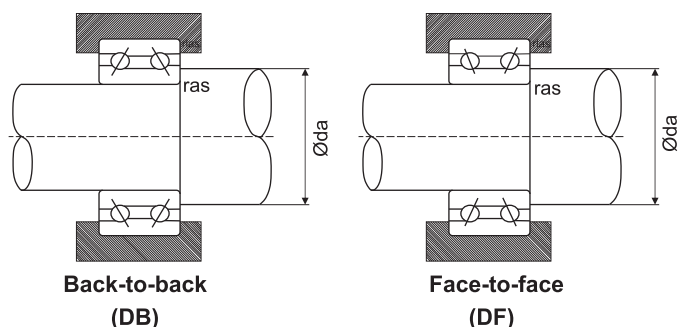

کد کتا	مرکز بار a	محدوده سرعت گریس روغن	d1	d2	D1	D2	da min	Da max	Db max	ras max	rlas max	ظرفیت (cm ³)	وزن (kg)
7200 C	7.0	42900 55600	17.4	-	23.0	26.2	14.5	25.5	27.5	0.6	0.3	0.9	0.029
7201 C	8.0	40000 51800	18.7	-	25.7	28.2	16.5	27.5	29.5	0.6	0.3	1.3	0.036
7202 C	9.0	35200 45600	21.7	-	28.7	31.3	19.5	30.5	32.5	0.6	0.3	1.5	0.045
7203 C	10.0	30500 39600	24.8	-	32.7	35.7	21.5	35.5	37.5	0.6	0.3	2.1	0.062
7204 C	11.5	25500 33000	29.2	-	38.5	41.9	25.5	41.5	42.5	1.0	0.6	3.1	0.1
7205 C	13.0	22600 29200	34.2	-	43.5	47.0	30.5	46.5	47.5	1.0	0.6	4.1	0.12
7206 C	14.0	18900 24500	40.8	-	52.0	56.0	35.5	56.5	57.5	1.0	0.6	6.6	0.19
7207 C	16.0	16400 21300	47.4	-	60.5	65.2	42	65	67.5	1.0	0.6	8.8	0.27
7208 C	17.0	14700 19000	53.5	-	67.5	72.4	47	73	75.5	1.0	0.6	11	0.35
7209 C	18.0	13500 17500	58.1	-	73.0	78.4	52	78	80.5	1.0	0.6	14	0.4
7210 C	19.0	12600 16300	63.1	-	78.0	82.5	57	83	85.5	1.0	0.6	17	0.45
7211 C	21.0	11400 14700	69.7	-	86.5	91.5	63.5	91.5	94.5	1.5	1.0	21	0.59
7212 C	22.0	10200 13200	76.3	-	95.0	100.5	68.5	101.5	105	1.5	1.0	28	0.76
7213 C	24.0	9500 12300	83.4	-	103.0	109.5	73.5	111.5	115	1.5	1.0	34	0.95
7214 C	25.0	9000 11700	87.9	-	108.5	114.5	78.5	116.5	120	1.5	1.0	40	1.04
7215 C	26.0	8500 11000	92.9	-	113.5	119.6	83.5	121.5	125	1.5	1.0	43	1.14
7216 C	28.0	8000 10400	99.6	-	121.9	128.6	90	130	135	2.0	1.0	54	1.39
7217 C	30.0	7500 9700	106.2	-	130.5	137.7	95	140	145	2.0	1.0	63	1.73
7218 C	32.0	7000 9100	112.9	-	138.9	146.7	100	150	155	2.0	1.0	80	2.13
7219 C	34.0	6600 8600	119.5	-	147.4	155.8	107	158	163	2.0	1.0	96	2.58
7220 C	36.0	6300 8100	126.2	-	155.9	164.8	112	168	173	2.0	1.0	119	3.21

به صورت سفارشی قابل تحویل می باشد