

HE-TRACK-ALPHA



HE-TRACK-ALPHA - diffuse light emission for glare-free work

The HE-TRACK-ALPHA LED machine lights are suitable for small and medium-sized machine tools. The housing is made of robust, silver anodized aluminum.

The 5 mm thick, tempered protective glass ensures a diffuse, glare-free light output due to the matt surface. The lights can be mounted both horizontally and vertically using optional mountings. The lights are shock resistant to vibration and can also be used in environments with cooling lubricant.

The HE-TRACK-ALPHA LED machine lights are extremely low maintenance thanks to the long life of the LED technology of about 50,000 operating hours.




HE-TRACK-ALPHA LED machine light series




Advantages of the HE-TRACK-ALPHA

- M12 connector for easy mains connection
- Modular expandable
- Individual alignment of the light
- 120° beam
- Robust design, shock and vibration resistant
- Resistant to commercial cooling lubricants
- Ambient temperature -20°C to + 55°C
- LED technology with up to 50,000 operating hours
- UL-certified

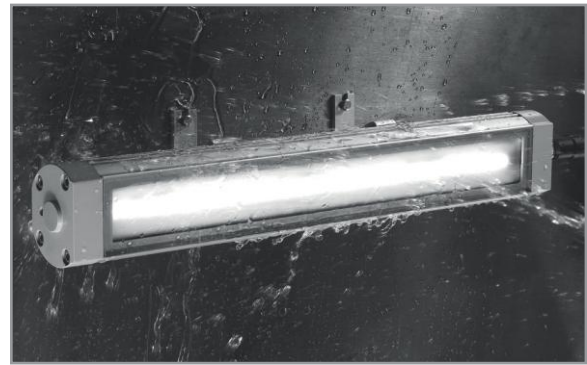

HE-TRACK-ALPHA in direct fluid influence

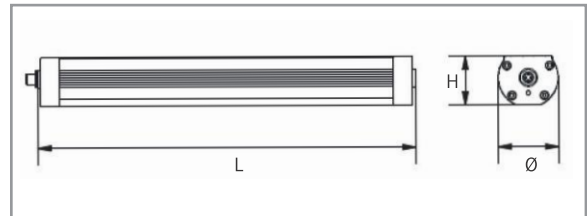

Type	L	Ø	H
HE-TRACK-ALPHA 2.50	321 mm	70 mm	57 mm
HE-TRACK-ALPHA 3.50	441 mm	70 mm	57 mm
HE-TRACK-ALPHA 5.50	681 mm	70 mm	57 mm
HE-TRACK-ALPHA 7.50	921 mm	70 mm	57 mm
HE-TRACK-ALPHA 8.50	1041 mm	70 mm	57 mm
HE-TRACK-ALPHA 10.50	1281 mm	70 mm	57 mm

Type	Operating voltage	Number of LEDs	Input	Watt	Color temperature	Beam	Mounting
HE-TRACK-ALPHA 2.50	24 VDC	36	0.6 A	13 W	5000 K	120°	Holder FX02
HE-TRACK-ALPHA 3.50	230 V	54	0.9 A	19,5 W	5000 K	120°	Holder FX02
HE-TRACK-ALPHA 5.50	230 V or 24 VDC	90	1.5 A	34 W	5000 K	120°	Holder FX02
HE-TRACK-ALPHA 7.50	24 VDC	126	2.1 A	47 W	5000 K	120°	Holder FX02
HE-TRACK-ALPHA 8.50	230 V	144	2.4 A	53,5 W	5000 K	120°	Holder FX02
HE-TRACK-ALPHA 10.50	24 VDC	180	3,0 A	68	5000 K	120°	Holder FX02

Supplied with M12 connector

