

# VRSF SERIES

VRSF



- Value engineered solution for simple servo and stepper motor applications
- Quiet operation: Helical cut gears contribute to reduced vibration and noise
- Wide range of mounting adapters offer a simple, precise attachment to any motor
- Lightweight aluminum body reduces excess weight
- Aluminum body, combined with other wash-down features can be used in harsh environments
- Maintenance-free solution that is lubricated for life. High performance grease allows flexible mounting in any orientation



تلفن : (021) 33913364 - 33951660

فكس : (021) 33985603

## VRSF B-Frame 1-Stage and 2-Stage Specifications

Frame Size	B								
Stage	1-Stage					2-Stage			
Ratio	Units	Note	3	5	9	15	20	25	35
Nominal Output Torque	[Nm]	1	3.43	2.84	2.35	4.02	5.00	6.27	3.84
Maximum Acceleration Torque	[Nm]	2	10.3	8.53	7.25	12.2	15.0	19.0	11.5
Emergency Stop Torque	[Nm]	--	--	--	--	--	--	--	--
Nominal Input Speed	[rpm]	3	3000			3000			
Maximum Input Speed	[rpm]	4	5000			5000			
No Load Running Torque	[Nm]	5	0.119			0.048			
Permitted Radial Load	[N]	6	392	490	588	784	804	882	882
Permitted Axial Load	[N]	7	196	245	294	392	402	441	441
Maximum Radial Load	[N]	8	882N			882N			
Maximum Axial Load	[N]	9	441N			441N			
Moment of Inertia ( $\leq \emptyset 8$ )	[kgcm <sup>2</sup> ]	--	0.081	0.059	0.052	0.057	0.056	0.056	0.052
Moment of Inertia ( $\leq \emptyset 14$ )	[kgcm <sup>2</sup> ]	--	0.150	0.130	0.120	0.130	0.130	0.130	0.120
Efficiency	[%]	10	90			85			
Torsional Rigidity	[Nm/arcmin]	11	0.8			0.8			
Backlash (Standard)	[Arc-min]	--	$\leq 15$			$\leq 15$			
Backlash (Low)	[Arc-min]	--	$\leq 10$			$\leq 10$			
Backlash (Precision)	[Arc-min]	--	$\leq 3$			$\leq 3$			
Noise Level	[dB]	12	$\leq 72$			$\leq 65$			
Protection Class	--	13	IP65			IP65			
Ambient Temperature	[°C]	--	0-40			0-40			
Permitted Housing Temperature	[°C]	--	90			90			
Weight ( $\leq \emptyset 8$ )	[kg]	14	0.58			0.75			
Weight ( $\leq \emptyset 14$ )	[kg]	14	0.7			0.86			

- 1) At nominal input speed, service life is 20,000 hours
- 2) The maximum torque when starting or stopping operation
- 3) The average input speed
- 4) The maximum intermittent input speed
- 5) Torque at no load applied to the input shaft at nominal input speed
- 6) At this load and nominal input speed, service life will be 20,000 hours. (The radial load applied to the output side shaft center)
- 7) At this load and nominal input speed, service life will be 20,000 hours. (The axial load applied to the output side bearing)
- 8) The maximum radial load that the gearbox can accept
- 9) The maximum axial load that the gearbox can accept
- 10) The efficiency at the nominal output torque rating
- 11) This does not include lost motion
- 12) Contact Nidec Drive Technology for the testing conditions and environment
- 13) IP65 (wash-down) is available as an option. Contact Nidec Drive Technology for more details
- 14) The weight may vary slightly between models

## VRSF C-Frame 1-Stage and 2-Stage Specifications

Frame Size	C										
Stage	1-Stage					2-Stage					
Ratio	Units	Note	3	5	9	15	20	25	35	45	81
Nominal Output Torque	[Nm]	1	6.86	11.5	9.7	16.2	21.1	26.4	15.5	9.5	9.7
Maximum Acceleration Torque	[Nm]	2	20.6	34.3	29.2	48.6	63.3	79.2	46.6	28.6	29.2
Emergency Stop Torque	[Nm]	--	--	--	--	--	--	--	--	--	--
Nominal Input Speed	[rpm]	3	3000			3000					
Maximum Input Speed	[rpm]	4	5000			5000					
No Load Running Torque	[Nm]	5	0.29			0.19					
Permitted Radial Load	[N]	6	784	980	1180	1470	1570	1670	1670	1670	1670
Permitted Axial Load	[N]	7	392	490	588	735	785	833	833	833	833
Maximum Radial Load	[N]	8	1670N			1670N					
Maximum Axial Load	[N]	9	833N			833N					
Moment of Inertia ( $\leq \varnothing 8$ )	[kgcm <sup>2</sup> ]	--	--	--	--	0.077	0.070	0.062	0.055	0.053	0.052
Moment of Inertia ( $\leq \varnothing 14$ )	[kgcm <sup>2</sup> ]	--	0.630	0.380	0.300	0.150	0.140	0.130	0.130	0.120	0.120
--	--	--	1.100	0.880	0.800	--	--	--	--	--	--
Efficiency	[%]	10	90			85					
Torsional Rigidity	[Nm/arcmin]	11	3			3					
Backlash (Standard)	[Arc-min]	--	$\leq 15$			$\leq 15$					
Backlash (Low)	[Arc-min]	--	$\leq 5$			$\leq 5$					
Backlash (Precision)	[Arc-min]	--	$\leq 3$			$\leq 3$					
Noise Level	[dB]	12	$\leq 72$			$\leq 65$					
Protection Class	--	13	IP 65			IP65					
Ambient Temperature	[°C]	--	0-40			0-40					
Permitted Housing Temperature	[°C]	--	90			90					
Weight ( $\leq \varnothing 8$ )	[kg]	14	--			1.8					
Weight ( $\leq \varnothing 14$ )	[kg]	14	1.8			1.9					
Weight ( $\leq \varnothing 19$ )	--	14	2.2			--					

- 1) At nominal input speed, service life is 20,000 hours
- 2) The maximum torque when starting or stopping operation
- 3) The average input speed
- 4) The maximum intermittent input speed
- 5) Torque at no load applied to the input shaft at nominal input speed
- 6) At this load and nominal input speed, service life will be 20,000 hours. (The radial load applied to the output side shaft center)
- 7) At this load and nominal input speed, service life will be 20,000 hours. (The axial load applied to the output side bearing)
- 8) The maximum radial load that the gearbox can accept
- 9) The maximum axial load that the gearbox can accept
- 10) The efficiency at the nominal output torque rating
- 11) This does not include lost motion
- 12) Contact Nidec Drive Technology for the testing conditions and environment
- 13) IP65 (wash-down) is available as an option. Contact Nidec Drive Technology for more details
- 14) The weight may vary slightly between models



تلفن : (021) 33913364 - 33951660

فکس : (021) 33985603

## VRSF D-Frame 1-Stage and 2-Stage Specifications

Frame Size	D										
Stage	1-Stage					2-Stage					
Ratio	Units	Note	3	5	9	15	20	25	35	45	81
Nominal Output Torque	[Nm]	1	18.3	23.5	18.2	30.4	40.6	50.7	37	28.3	17.8
Maximum Acceleration Torque	[Nm]	2	54.9	70.6	54.7	91.2	122	152	111	85.2	53.5
Emergency Stop Torque	[Nm]	--	--	--	--	--	--	--	--	--	--
Nominal Input Speed	[rpm]	3	3000			3000					
Maximum Input Speed	[rpm]	4	5000			5000					
No Load Running Torque	[Nm]	5	0.51			0.26					
Permitted Radial Load	[N]	6	882	1080	1470	1760	1910	2060	2060	2060	2060
Permitted Axial Load	[N]	7	441	539	735	882	955	1030	1030	1030	1030
Maximum Radial Load	[N]	8	2060N			2060N					
Maximum Axial Load	[N]	9	1030N			1030N					
Moment of Inertia ( $\leq \varnothing 8$ )	[kgcm <sup>2</sup> ]	--	--	--	--	--	--	--	--	--	0.10
Moment of Inertia ( $\leq \varnothing 14$ )	[kgcm <sup>2</sup> ]	--	1.30	0.59	0.38	0.37	0.35	0.34	0.30	0.29	0.29
Moment of Inertia ( $\leq \varnothing 19$ )	[kgcm <sup>2</sup> ]	--	1.80	1.10	0.90	0.86	0.84	0.83	0.79	0.78	0.77
Moment of Inertia ( $\leq \varnothing 28$ )	[kgcm <sup>2</sup> ]	--	3.60	2.90	2.70	2.70	2.70	2.70	--	--	--
Efficiency	[%]	10	90			85					
Torsional Rigidity	[Nm/arcmin]	11	6			6					
Backlash (Standard)	[Arc-min]	--	$\leq 15$			$\leq 15$					
Backlash (Low)	[Arc-min]	--	$\leq 5$			$\leq 5$					
Backlash (Precision)	[Arc-min]	--	$\leq 3$			$\leq 3$					
Noise Level	[dB]	12	$\leq 72$			$\leq 65$					
Protection Class	--	13	IP65			IP65					
Ambient Temperature	[°C]	--	0-40			0-40					
Permitted Housing Temperature	[°C]	--	90			90					
Weight ( $\leq \varnothing 8$ )	[kg]	14	--			2.8					
Weight ( $\leq \varnothing 14$ )	[kg]	14	2.8			3.3					
Weight ( $\leq \varnothing 19$ )	[kg]	14	3.2			3.7					
Weight ( $\leq \varnothing 28$ )	[kg]	14	4.0			4.8					

- 1) At nominal input speed, service life is 20,000 hours
- 2) The maximum torque when starting or stopping operation
- 3) The average input speed
- 4) The maximum intermittent input speed
- 5) Torque at no load applied to the input shaft at nominal input speed
- 6) At this load and nominal input speed, service life will be 20,000 hours. (The radial load applied to the output side shaft center)
- 7) At this load and nominal input speed, service life will be 20,000 hours. (The axial load applied to the output side bearing)
- 8) The maximum radial load that the gearbox can accept
- 9) The maximum axial load that the gearbox can accept
- 10) The efficiency at the nominal output torque rating
- 11) This does not include lost motion
- 12) Contact Nidec Drive Technology for the testing conditions and environment
- 13) IP65 (wash-down) is available as an option. Contact Nidec Drive Technology for more details
- 14) The weight may vary slightly between models

## VRSF E-Frame 1-Stage and 2-Stage Specifications

Frame Size	E										
Stage	1-Stage					2-Stage					
Ratio	Units	Note	3	5	9	15	20	25	35	45	81
Nominal Output Torque	[Nm]	1	44.1	56.8	73.5	91.4	78.4	65.4	71	91.3	43.3
Maximum Acceleration Torque	[Nm]	2	132	171	221	274	235	196	213	274	130
Emergency Stop Torque	[Nm]	--	--	--	--	--	--	--	--	--	--
Nominal Input Speed	[rpm]	3	3000			3000					
Maximum Input Speed	[rpm]	4	5000			5000					
No Load Running Torque	[Nm]	5	1.12			0.62					
Permitted Radial Load	[N]	6	1370	1670	1960	2350	2500	2650	3430	3520	3530
Permitted Axial Load	[N]	7	686	833	980	1180	1250	1320	1715	1760	1765
Maximum Radial Load	[N]	8	3530N			3530N					
Maximum Axial Load	[N]	9	1765N			1765N					
Moment of Inertia ( $\leq \varnothing 8$ )	[kgcm <sup>2</sup> ]	--	--	--	0.61	0.63	0.56	0.53	0.40	0.35	0.34
Moment of Inertia ( $\leq \varnothing 14$ )	[kgcm <sup>2</sup> ]	--	4.40	1.90	1.20	1.10	1.10	1.00	0.90	0.85	0.84
Moment of Inertia ( $\leq \varnothing 19$ )	[kgcm <sup>2</sup> ]	--	6.20	3.70	2.90	3.30	3.20	3.20	2.80	2.70	2.70
Moment of Inertia ( $\leq \varnothing 28$ )	[kgcm <sup>2</sup> ]	--	14.00	11.00	11.00	11.00	11.00	11.00	--	--	--
Efficiency	[%]	10	90			85					
Torsional Rigidity	[Nm/arcmin]	11	20			20					
Backlash (Standard)	[Arc-min]	--	$\leq 15$			$\leq 15$					
Backlash (Low)	[Arc-min]	--	$\leq 5$			$\leq 5$					
Backlash (Precision)	[Arc-min]	--	$\leq 3$			$\leq 3$					
Noise Level	[dB]	12	$\leq 75$			$\leq 75$					
Protection Class	--	13	IP65			IP65					
Ambient Temperature	[°C]	--	0-40			0-40					
Permitted Housing Temperature	[°C]	--	90			90					
Weight ( $\leq \varnothing 8$ )	[kg]	14	6.1			7.1					
Weight ( $\leq \varnothing 14$ )	[kg]	14	6.5			7.5					
Weight ( $\leq \varnothing 19$ )	[kg]	12	7.4			9.3					
Weight ( $\leq \varnothing 28$ )	[kg]	12	9.8			11.7					


- 1) At nominal input speed, service life is 20,000 hours
- 2) The maximum torque when starting or stopping operation
- 3) The average input speed
- 4) The maximum intermittent input speed
- 5) Torque at no load applied to the input shaft at nominal input speed
- 6) At this load and nominal input speed, service life will be 20,000 hours. (The radial load applied to the output side shaft center)
- 7) At this load and nominal input speed, service life will be 20,000 hours. (The axial load applied to the output side bearing)
- 8) The maximum radial load that the gearbox can accept
- 9) The maximum axial load that the gearbox can accept
- 10) The efficiency at the nominal output torque rating
- 11) This does not include lost motion
- 12) Contact Nidec Drive Technology for the testing conditions and environment
- 13) IP65 (wash-down) is available as an option. Contact Nidec Drive Technology for more details
- 14) The weight may vary slightly between models



تلفن : (021) 33913364 - 33951660


فکس : (021) 33985603

## VRSF B-Frame 1-Stage and 2-Stage Dimensions

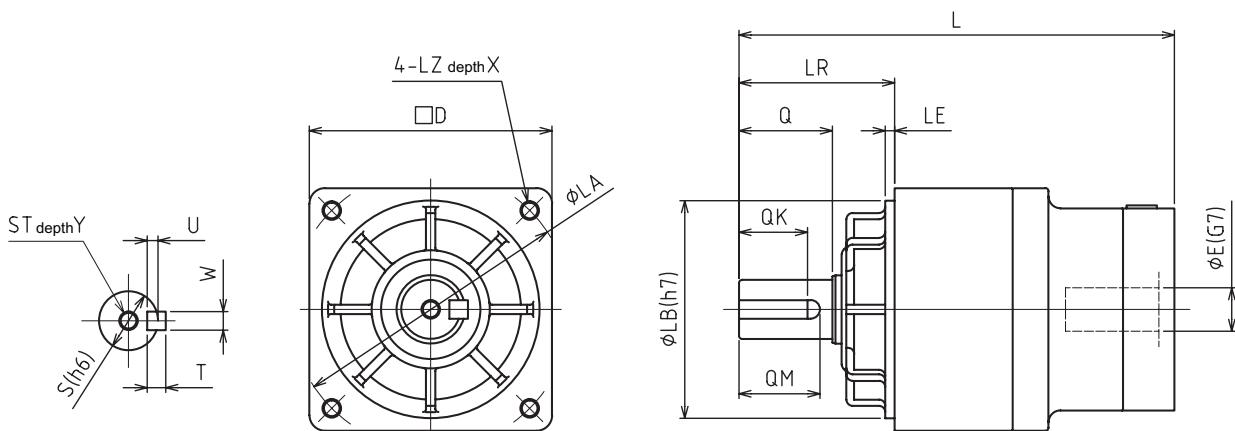


Frame Size	Ratio	Input Bore Dia. E	Dimensions															
			L	LR	S	ST	Y	Q	QM	QK	W×U	T	D	LB	LE	LA	LZ	X
<b>B</b>	1-Stage	≤φ8	104.5	32	12	M5	10	20	18	16	4×2.5	4	52	50	3	60	M5	12
		≤φ14	107.5															
	2-Stage	≤φ8	115.5															
		≤φ14	118.5															

## VRSF C-Frame 1-Stage and 2-Stage Dimensions

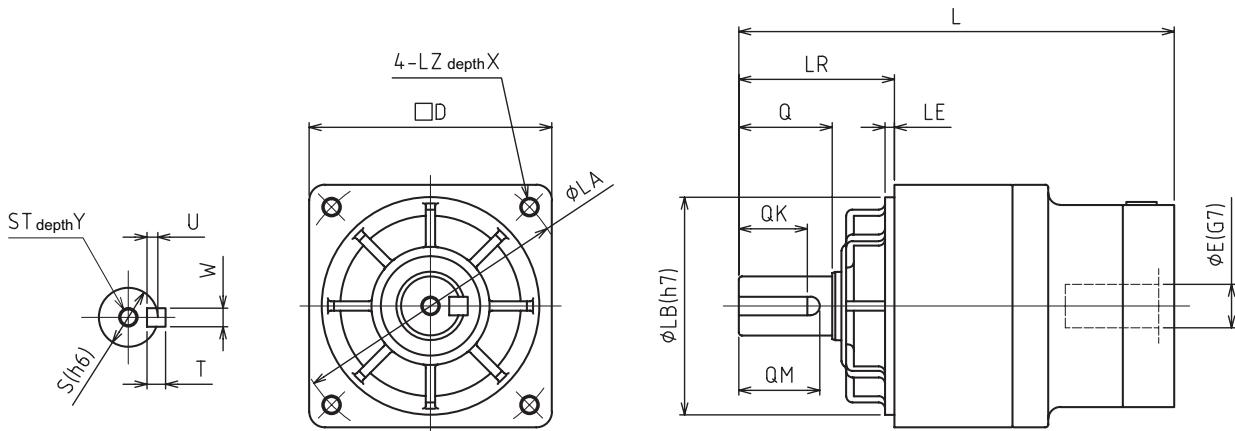


Frame Size	Ratio	Input Bore Dia. E	Dimensions															
			L	LR	S	ST	Y	Q	QM	QK	W×U	T	D	LB	LE	LA	LZ	X
<b>C</b>	1-Stage	≤φ14	140	50	19	M6	12	30	26	22	6×3.5	6	78	70	3	90	M6	20
		≤φ19	156															
	2-Stage	≤φ8	147.5															
		≤φ14	150.5															

## VRSF D-Frame 1-Stage and 2-Stage Dimensions

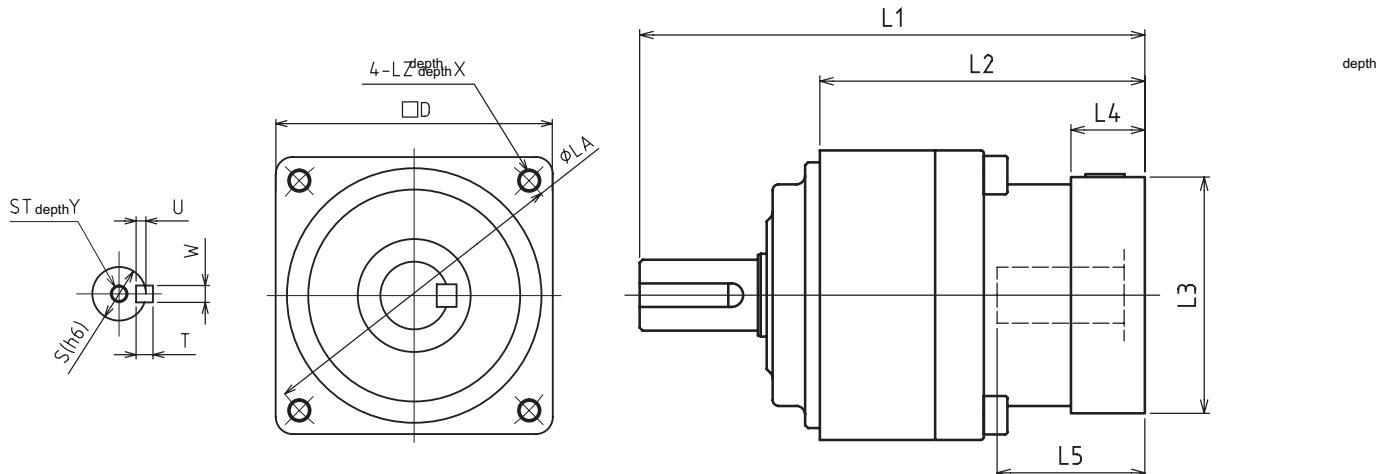

Frame Size	Ratio	Input Bore Dia. E	Dimensions															
			L	LR	S	ST	Y	Q	QM	QK	W×U	T	D	LB	LE	LA	LZ	X
D	1-Stage	≤ φ14	155	61	24	M8	16	40	35	30	8×4	7	98	90	5	115	M8	20
		≤ φ19	171															
		≤ φ28	186															
	2-Stage	≤ φ8	163															
		≤ φ14	169															
		≤ φ19	184															
		≤ φ28	200.5															

## VRSF E-Frame 1-Stage and 2-Stage Dimensions

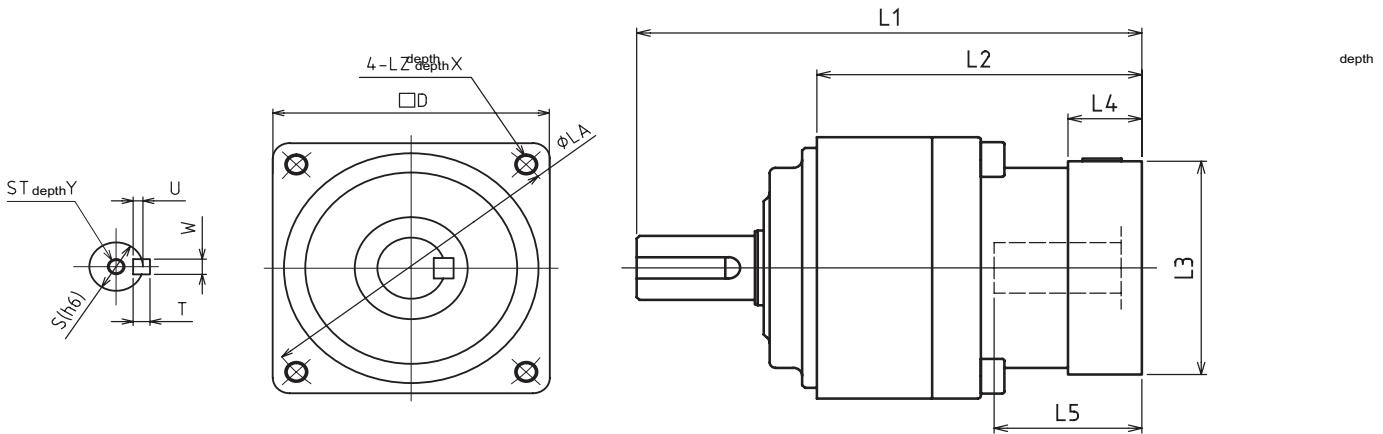

Frame Size	Ratio	Input Bore Dia. E	Dimensions															
			L	LR	S	ST	Y	Q	QM	QK	W×U	T	D	LB	LE	LA	LZ	X
E	1-Stage	≤ φ14	189	75	32	M10	20	55	52	45	10×5	8	125	110	5	135	M10	20
		≤ φ19	198.5															
		≤ φ28	224															
		≤ φ38	240															
	2-Stage	≤ φ14	210															
		≤ φ19	225															
		≤ φ28	246.5															
		≤ φ38	261.5															



تلفن : (021) 33913364 - 33951660

فکس : (021) 33985603