


## CPSS

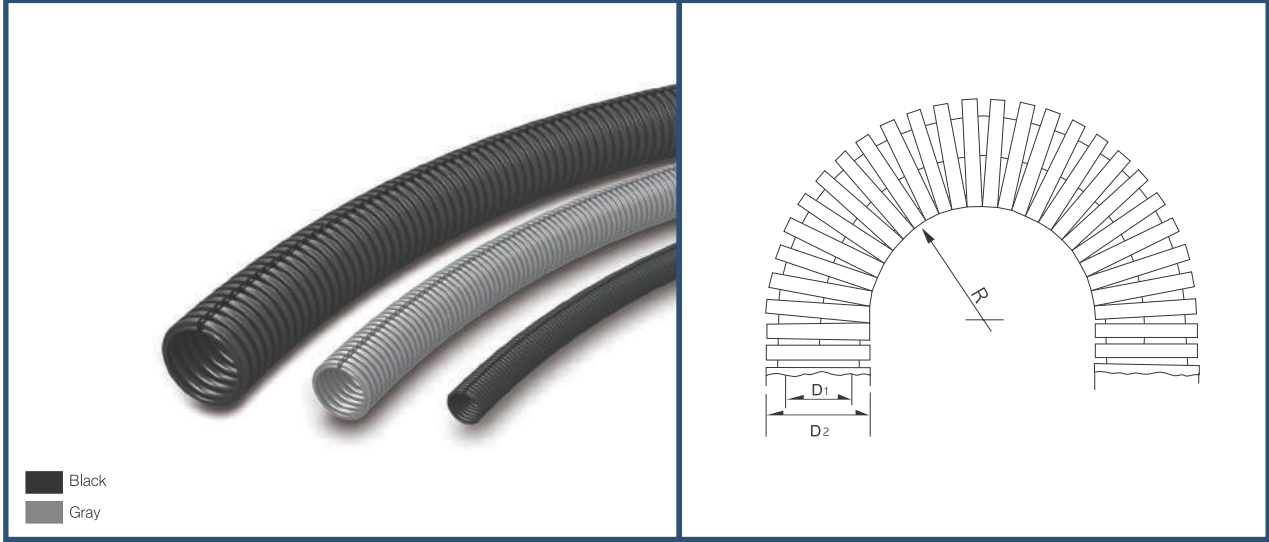

- Material : High Quality Polyamide 6
- Construction : Inside & Outside Corrugated Plastic Hose
- The max. Instantaneous Temperature : -40°C to +105°C
- Short Term : up to +130°C
- Self-Extinguishing : UL94-HB, Halogen-Free
- Color : Black & Gray, Light gray (MOQ:100rolls)
- Connections : CPSFIX
- Application : Machine tool, Shipbuilding, Tramway Industrial, Automatic Machinery Printing Machinery etc.

### »» Product size

Black	Gray	Inner Diameter (D1)	Outer Diameter (D2)	Bending Radius(R) mm ± 10%	Packing meter / roll
CPSS-07B	CPSS-07G	6.4	10.0	15	50/100
CPSS-10B	CPSS-10G	9.6	13.0	20	50
CPSS-12B	CPSS-12G	11.8	15.8	30	50
CPSS-16B	CPSS-16G	15.9	21.2	40	50
CPSS-22B	CPSS-22G	21.7	28.5	45	50
CPSS-28B	CPSS-28G	27.8	34.5	55	50
CPSS-36B	CPSS-36G	36.0	42.5	60	30
CPSS-48B	CPSS-48G	46.5	54.5	70	30
CPSS-56B	CPSS-56G	56.3	67.2	110	30
CPSS-70B	CPSS-70G	70.0	82.5	160	10
CPSS-95B	CPSS-95G	91.5	106.0	210	10

(Dimensions in mm)

