



## PAC IP68



- Material : High Quality Polyamide 6
- Degrees of Protection : IP 68 (EN 60529)
- The max. Instantaneous Temperature : -40°C to +105°C
- Short Term : up to +150°C
- Self-Extinguishing : UL94-HB / Free of Halogen Phosphorous and cadmium
- Color : Black & Gray
- Application : Machine tool, Shipbuilding, Tramway, Industrial / Automatic Machinery, Printing Machine etc. Joint box with connector
- Certification : 

### » Product size

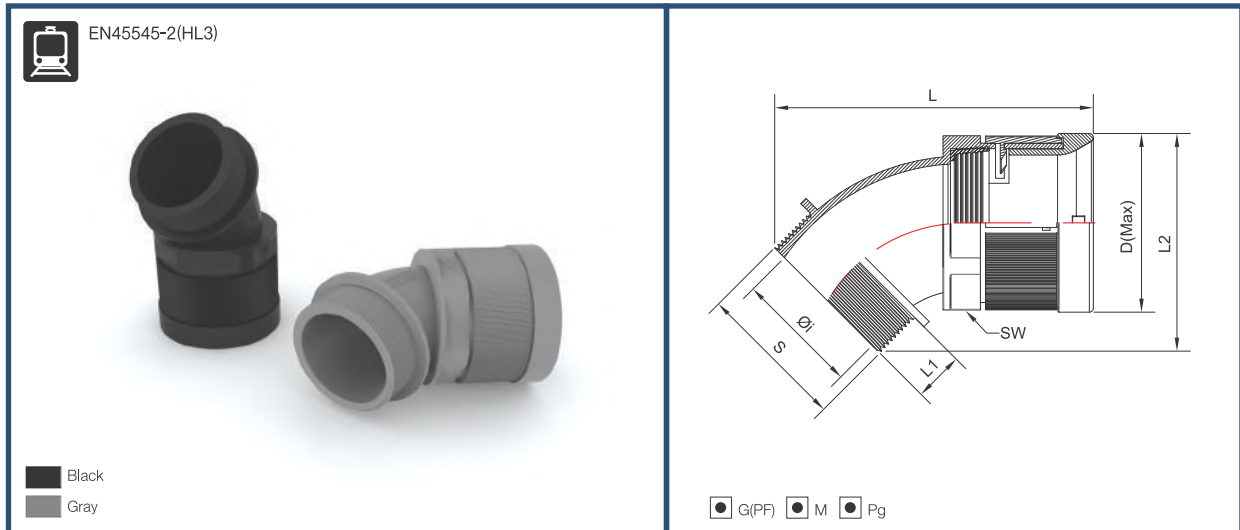

#### PF Thread (JIS B0202)

(단위 : mm)

Black	Gray	Thread	Tube Size	S	L1	L2	L	Øi	ØD	SW
PAC-G10B	PAC-G10G	G1/2"	10	21.0	13.0	35.5	61.5	15.1	24.5	19.7
PAC-G12B	PAC-G12G	G1/2"	12	21.0	13.0	37.6	62.7	15.1	27.6	22.8
PAC-G16B	PAC-G16G	G1/2"	16	21.0	13.0	41.1	66.4	15.3	33.0	28.0
PAC-G22B	PAC-G22G	G3/4"	22	26.5	15.0	50.8	80.7	22.2	43.0	37.5
PAC-G28B	PAC-G28G	G1"	28	33.3	15.0	56.6	92.7	27.2	48.8	43.0
PAC-G36B	PAC-G36G	G1 1/4"	36	41.9	20.0	71.3	111.7	34.3	60.6	52.2
PAC-G42B	PAC-G42G	G1 1/2"	48	47.8	20.0	80.1	121.5	41.1	71.8	64.0
PAC-G48B	PAC-G48G	G2"	48	59.6	20.0	84.1	125.5	50.4	71.8	64.0

※ Available in Light Gray production,

(Dimensions in mm)



Ordering No.



## Metric Thread (EN 60423)

(Dimensions in mm)

Black	Gray	Thread	Tube Size	S	L1	L2	L	Øi	ØD	SW
PAC-M10B	PAC-M10G	M12 X 1,5	10	12,0	13,0	32,2	58,6	8,1	24,5	19,7
PAC-M12B	PAC-M12G	M16 X 1,5	12	16,0	13,0	35,8	61,3	12,1	27,6	22,8
PAC-M202B	PAC-M202G	M20 X 1,5	12	20,0	13,0	37,2	62,7	15,1	27,6	22,8
PAC-M16B	PAC-M16G	M20 X 1,5	16	20,0	13,0	40,6	66,3	15,3	33,0	28,0
PAC-M22B	PAC-M22G	M25 X 1,5	22	25,0	15,0	50,2	80,6	20,8	43,0	37,5
PAC-M28B	PAC-M28G	M32 X 1,5	28	32,0	15,0	56,4	92,5	27,2	48,8	43,0
PAC-M36B	PAC-M36G	M40 X 1,5	36	40,0	20,0	70,5	111,5	34,3	60,6	52,2
PAC-M48B	PAC-M48G	M50 X 1,5	48	50,0	20,0	81,3	122,5	42,3	71,8	64,0

## Pg Thread (DIN 40430)

Black	Gray	Thread	Tube Size	S	L1	L2	L	Øi	ØD	SW
PAC-P09B	PAC-P09G	Pg09	10	15,5	13,0	33,7	59,8	11,1	24,5	19,7
PAC-P110B	PAC-P110G	Pg11	10	18,6	13,0	34,8	60,9	15,1	24,5	19,7
PAC-P130B	PAC-P130G	Pg13,5	10	20,4	13,0	35,4	61,5	15,1	24,5	19,7
PAC-P11B	PAC-P11G	Pg11	12	18,6	13,0	37,1	62,2	14,1	27,6	22,8
PAC-P136B	PAC-P136G	Pg13,5	16	20,4	13,0	41,1	66,5	15,3	33,0	28,0
PAC-P16B	PAC-P16G	Pg16	16	22,5	13,0	41,8	67,3	17,6	33,0	28,0
PAC-P21B	PAC-P21G	Pg21	22	28,3	15,0	51,7	81,7	22,2	43,0	37,5
PAC-P29B	PAC-P29G	Pg29	28	37,0	15,0	57,8	94,1	31,2	48,8	43,0
PAC-P36B	PAC-P36G	Pg36	36	47,0	20,0	73,3	113,9	40,3	60,6	52,2
PAC-P48B	PAC-P48G	Pg48	48	59,3	20,0	84,6	125,9	50,4	71,8	64,0

