


## PES

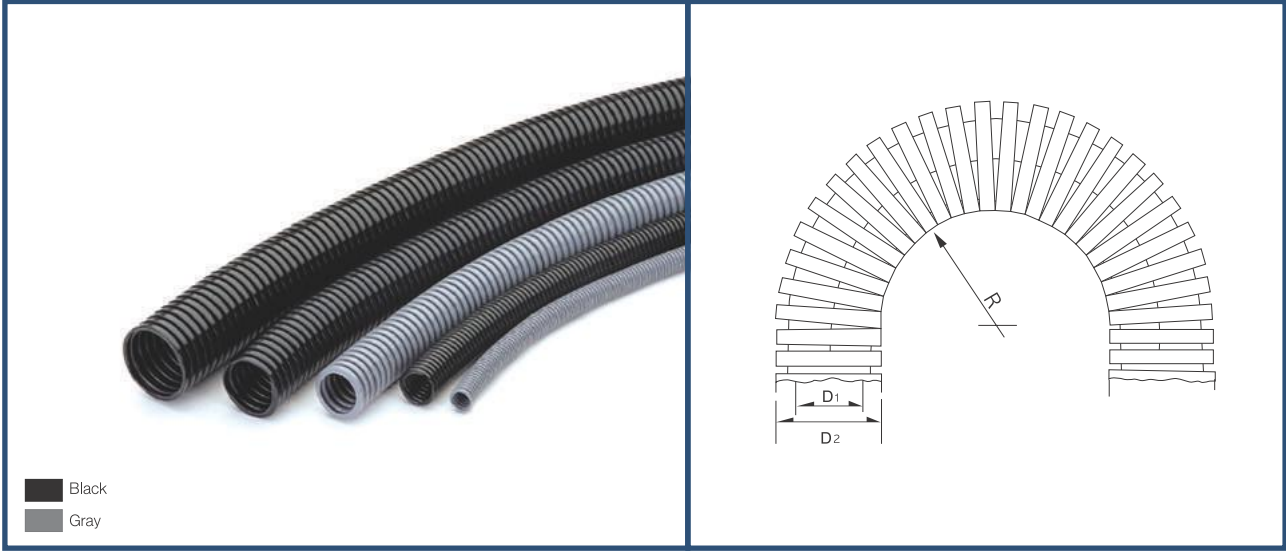

- Material : Soft Polyethylene (PE)
- Construction : Inside & Outside Corrugated Plastic Hose
- Degrees of Protection : IP 68
- The max. Instantaneous Temperature : -15°C to +60°C
- Short Term : up to +80°C
- Color : Black & Gray
- Resistant to : Acid, Alkali
- Application : Machine tool, Plant Construction Crane and Heavy Machinery etc.

### » Product size

Black	Gray	Inner Diameter (D1)	Outer Diameter (D2)	Bending Radius(R) mm ±10%	Packing meter / roll
PES-07B	PES-07G	6.4	10.0	15	50/100
PES-10B	PES-10G	9.6	13.0	20	50
PES-12B	PES-12G	11.8	15.8	30	50
PES-16B	PES-16G	15.9	21.2	40	50
PES-22B	PES-22G	21.7	28.5	45	50
PES-28B	PES-28G	27.8	34.5	55	50
PES-36B	PES-36G	36.0	42.5	60	30
PES-48B	PES-48G	46.5	54.5	70	30
PES-56B	PES-56G	56.3	67.2	110	30
PES-70B	PES-70G	70.0	82.5	160	10
PES-95B	PES-95G	91.5	106.0	210	10

(Dimensions in mm)

