


## POH

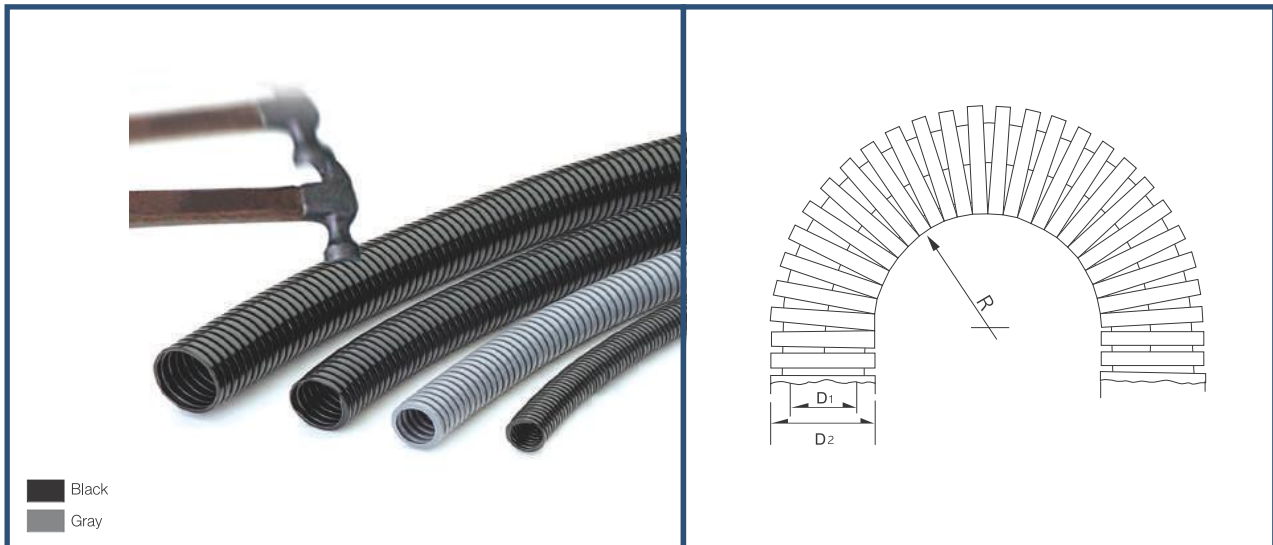

- Material : High Quality Polyamide 6
- Construction : Inside & Outside Corrugated Plastic Hose
- Degrees of Protection : IP 68 acc. EN 60529
- The max. Instantaneous Temperature : -40°C to +105°C
- Short Term : up to +150°C
- Self-Extinguishing : UL94-HB, Halogen-Free
- Color : Black & Gray
- Connections : CPSFIX
- Application : Machine tool, Plant Construction Crane and Heavy Machinery etc.

### »» Product size

Black	Gray	UV-R	Inner Diameter (D1)	Outer Diameter (D2)	Bending Radius(R) mm ± 10%	Packing meter / roll
POH-07B	POH-07G	POH-07U	6.0	10.0	20	50/100
POH-10B	POH-10G	POH-10U	9.0	13.0	25	50
POH-12B	POH-12G	POH-12U	11.5	15.8	35	50
POH-16B	POH-16G	POH-16U	15.5	21.2	45	50
POH-22B	POH-22G	POH-22U	21.3	28.5	50	50
POH-28B	POH-28G	POH-28U	26.8	34.5	60	50
POH-36B	POH-36G	POH-36U	35.2	42.5	70	30
POH-48B	POH-48G	POH-48U	46.0	54.5	80	30
POH-56B	POH-56G	POH-56U	55.3	67.2	110	30
POH-70B	POH-70G	POH-70U	69.0	82.5	160	10
POH-95B	POH-95G	POH-95U	91.5	106.0	210	10

(Dimensions in mm)

