

HE-T-LED

The HE-T-LED lights are perfect for the permanent lighting of manual and open milling and drilling machines. The light is available in three sizes of 6 W, 12 W and 18 W.

The housing of the HE-T-LED is made of aluminum with a coating of polycarbonate.




Machine interior lighting HE-T-LED mit mounting brackets

All versions of the HE-TLED meet the requirements of the protection class IP 68.


The encapsulated design prevents the penetration of foreign particles or moisture, the high quality of light is maintained. Thanks to the long life and high quality of the LED, the maintenance effort is significantly reduced and energy costs can be saved.

Advantage of the HE-TLED

- Direct 24V connection, integrated switching device
- Easy mounting via holder or clip
- Robust design, shock and vibration resistant
- Ambient temperature -20°C to + 55°C
- LED technology with up to 50,000 operating hours

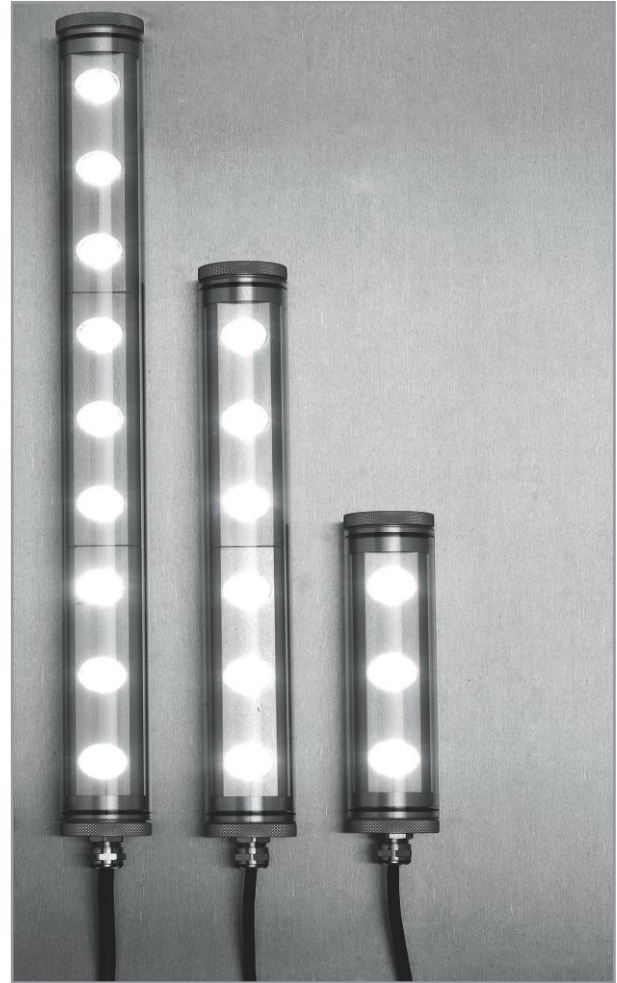

HE-T-LED series

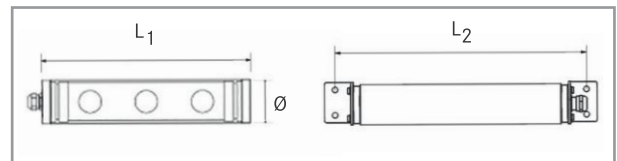

Type	L ₁	L ₂	Ø
HE-T-LED.3XX	167 mm	201 mm	36 mm
HE-T-LED.6XX	302 mm	336 mm	36 mm
HE-T-LED.9XX	437 mm	471 mm	36 mm



Type	Operating voltage	Number of LEDs	Input	Watt	Farb-temperatur	Mounting
HE-T-LED.3XX	24 VDC / 230 V	3	0.5 A	6 W	5000 K CRI 75	Clip / Holder T.FX01
HE-T-LED.6XX	24 VDC / 230 V	6	0.5 A	12 W	5000 K CRI 75	Clip / Holder T.FX01
HE-T-LED.9XX	230 V	9	0.5 A	18 W	5000 K CRI 75	Clip / Holder T.FX01

Supplied with cable length 1.5 m, cable end at 24 VDC connection with free stranded ends

