


ARFM.1Y

موتور های سری 1Y سایز کوچک به صورت شفت ساده و سری فشنگی خور



Type	A mm	B mm	C mm	D mm	E mm	F mm	H mm	K mm	L mm	M mm	ϕd	ϕD	ϕdL
ARFM.1Y-S	180	77	71	98	25	53.5	39.5	17.5	55	-	16	54	19
ARFM.1Y-M	230	77	71	98	25	53.5	39.5	17.5	35	40	16	54	19
Type	KW/HP		Rpm	HZ	Volt		Ampere	kg	PENS/COLLETS				
ARFM.1Y-S2	0.18 / 0.25		12000	200	220v.3~		0.8	2.1	ER 11 1-7 mm ER 16 1-10 mm				
ARFM.1Y-S3	0.25 / 0.34		18000	300	220v.3~		1.1	2.1					
ARFM.1Y-M2	0.37 / 0.5		12000	200	220v.3~		1.6	3.1					
ARFM.1Y-M3	0.55 / 0.75		18000	300	220v.3~		2.2	3.1					
ARFM.1Y-M4	0.75 / 1		24000	400	220v.3~		2.6	3.1					

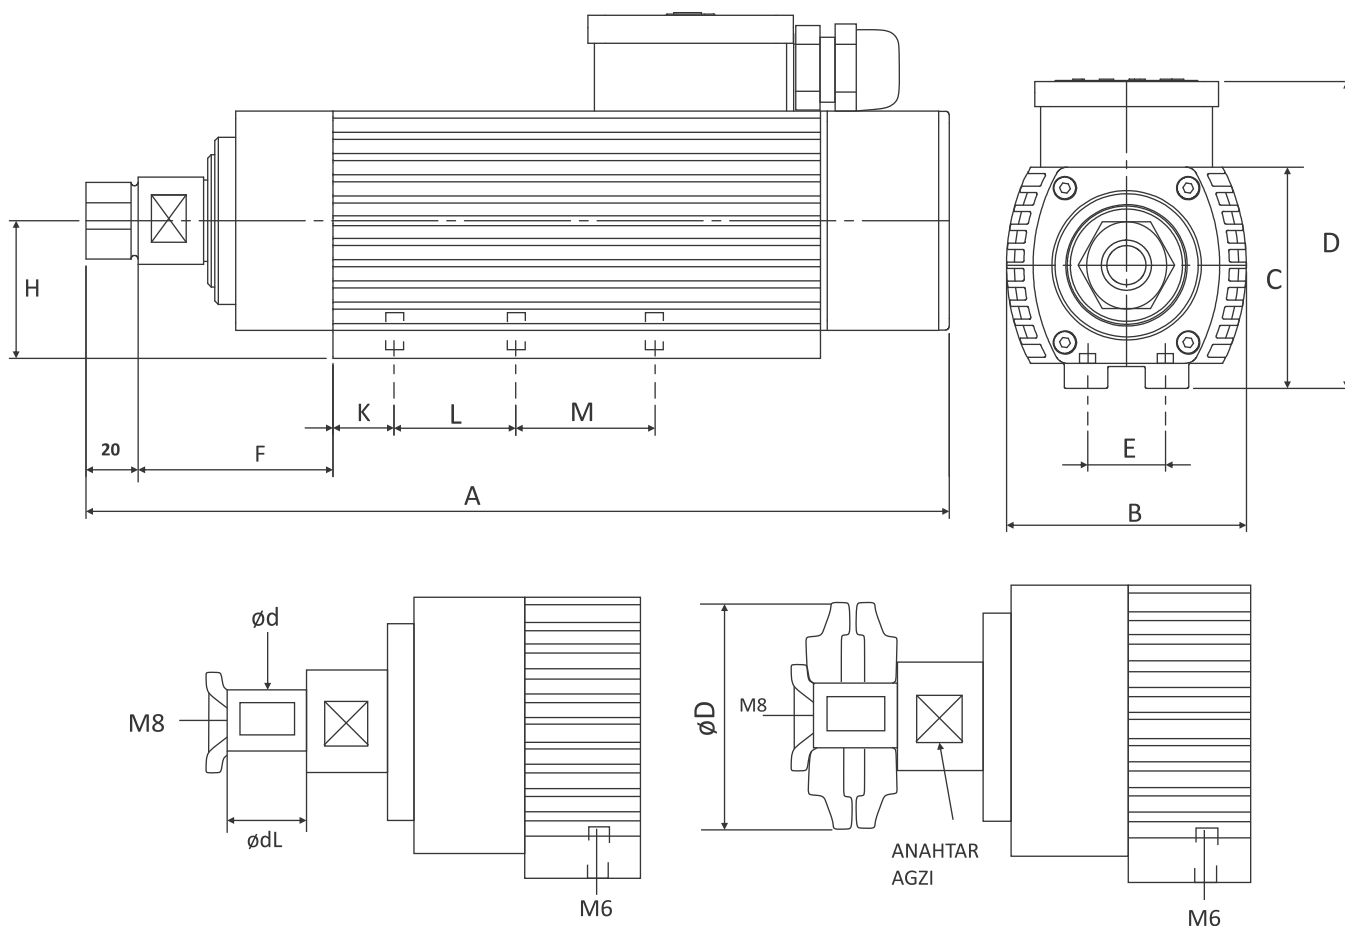