

D-OLD Series




D-OLD Series

- High torque
- Compacter axial size
- Self-centering
- Self-locking
- No axial movement during clamping

Technical qualification

Tolerance : Shaft h8 / Hub H8

Surface roughness : Ra max. 12.5

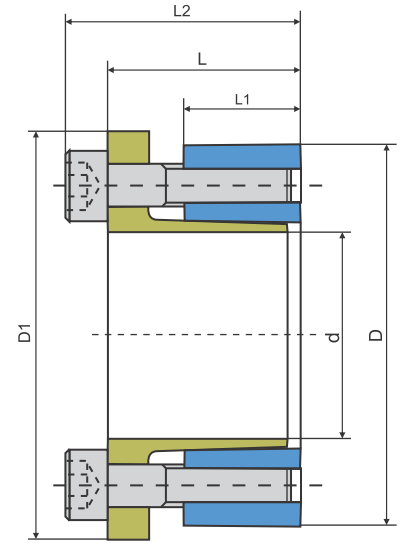

(Screw head height = Screw diameter)

Part No.	Size (mm)	Dimensions (mm)			Rated Load		Contact Pressure		Locking Screws		Weight (Approx.) (kg)
	dxDxL	L1	L2	D1	Axial (KN)	Torque (N.m)	Shaft (Mpa)	Hub (Mpa)	NxType (G. 12.9)	Tightening (N.m)	
OBC-14x55x30 D-OLD	14x55x30	17	38	62	17	120	207	56	3xM8	25	0.49
OBC-16x55x30 D-OLD	16x55x30	17	38	62	18	136	175	53	3xM8	25	0.48
OBC-18x55x30 D-OLD	18x55x30	17	38	62	18	150	163	56	3xM8	25	0.47
OBC-19x55x30 D-OLD	19x55x30	17	38	62	19	170	158	58	3xM8	25	0.47
OBC-20x55x30 D-OLD	20x55x30	17	38	62	17	160	141	53	3xM8	25	0.46
OBC-22x55x30 D-OLD	22x55x30	17	38	62	26	290	189	77	3xM8	35	0.45
OBC-24x55x30 D-OLD	24x55x30	17	38	62	24	290	165	73	3xM8	35	0.43
OBC-25x55x30 D-OLD	25x55x30	17	38	62	24	300	160	73	3xM8	35	0.42
OBC-28x55x30 D-OLD	28x55x30	17	38	62	31	430	173	89	3xM8	41	0.40
OBC-30x55x30 D-OLD	30x55x30	17	38	62	30	450	158	86	3xM8	41	0.38
T-Series Size											
OBC-24x65x30 D-OLD	24x65x30	17	38	72	40	430	237	87	5xM8	30	0.63
OBC-25x65x30 D-OLD	25x65x30	17	38	72	40	440	221	86	5xM8	30	0.62
OBC-28x65x30 D-OLD	28x65x30	17	38	72	40	610	248	107	5xM8	35	0.59
OBC-30x65x30 D-OLD	30x65x30	17	38	72	40	590	222	103	5xM8	35	0.57
OBC-32x65x30 D-OLD	32x65x30	17	38	72	40	660	202	100	5xM8	35	0.56
OBC-35x65x30 D-OLD	35x65x30	17	38	72	50	950	243	131	5xM8	41	0.52
OBC-38x65x30 D-OLD	38x65x30	17	38	72	50	1000	218	127	5xM8	41	0.49
OBC-40x65x30 D-OLD	40x65x30	17	38	72	50	1090	213	131	5xM8	41	0.47
HL-Series Size											
OBC-30x80x33 D-OLD	30x80x33	20	41	87	50	800	239	90	7xM8	30	1.02
OBC-32x80x33 D-OLD	32x80x33	20	41	87	50	860	226	90	7xM8	30	1.01
OBC-35x80x33 D-OLD	35x80x33	20	41	87	60	1100	239	105	7xM8	35	0.98
OBC-38x80x33 D-OLD	38x80x33	20	41	87	60	1200	223	106	7xM8	35	0.94
OBC-40x80x33 D-OLD	40x80x33	20	41	87	60	1200	203	102	7xM8	35	0.91
OBC-42x80x33 D-OLD	42x80x33	20	41	87	70	1500	228	120	7xM8	41	0.88
OBC-45x80x33 D-OLD	45x80x33	20	41	87	70	1600	215	121	7xM8	41	0.84
OBC-48x80x33 D-OLD	48x80x33	20	41	87	70	1700	197	118	7xM8	41	0.78
OBC-50x80x33 D-OLD	50x80x33	20	41	87	70	1800	195	122	7xM8	41	0.74

