


## Ordering Key : SMF 20

1

2

1 SMF Round Flange Self-Lubricated Linear Bearing

2 Bearing Inner Diameter

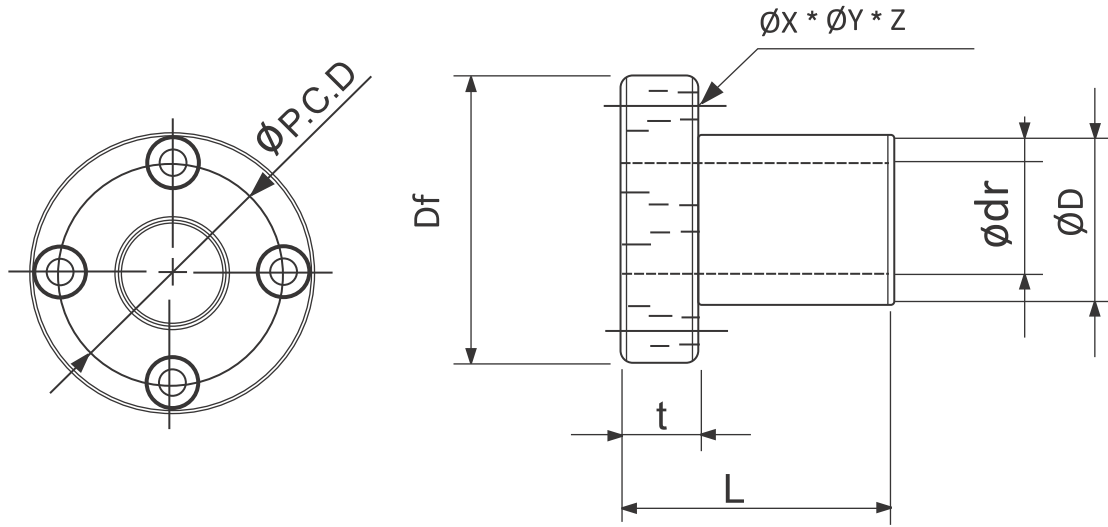

Model NO	Inner Dia Ødr(F8)	ØD(F6)	L	ØDf	t	P.C.D	ØX	ØY	Z
SMF 6	6	12	19	28	8	20	3.5	6.0	3.1
SMF 8	8	15	24	32	8	24	3.5	6.0	3.1
SMF 10	10	19	29	40	9	29	4.5	7.5	4.1
SMF 12	12	21	30	42	9	32	4.5	7.5	4.1
SMF 16	16	28	37	48	9	38	4.5	7.5	4.1
SMF 20	20	32	42	54	11	43	5.5	9.0	5.1
SMF 25	25	40	59	62	11	51	5.5	9.0	5.1
SMF 30	30	45	64	74	14	60	6.6	11.0	6.1
Model NO	Max. Static Load kgf	Max. PV kgf *m/sec	Max. Speed m/sec	Weight g					
SMF 6	80	4.1	2	12					
SMF 8	130	6.9	2	14					
SMF 10	200	10.4	2	36					
SMF 12	250	12.9	2	38					
SMF 16	410	21.2	2	60					
SMF 20	580	30.1	2	80					
SMF 25	1000	52.8	2	160					
SMF 30	1300	68.7	2	212					

